


HHB[®]

Ball Bearing Units

HHB[®]

BEARING

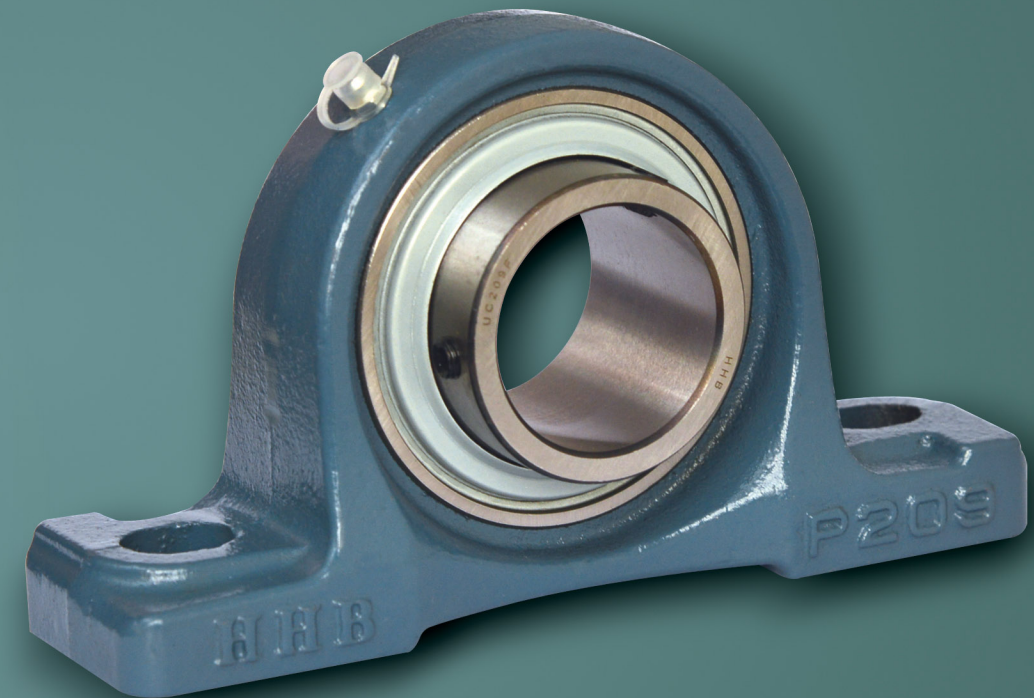

河北海蓝轴承制造有限公司

HEBEI HAILAN BEARING MANUFACTURE CO.,LTD

地址：河北省临西县河西镇工业园区 054901

ADD: Hexi Town Industrial Park, Linxi County, Hebei, China

电话/TEL: 0086-319-8542274(Factory)

0086-635-2970300(Int'l Dept)

0086-319-8542291(Factory)

0086-635-2970399(Int'l Dept)

0086-319-3725658(Factory)

传真/FAX: 0086-319-8542290(Factory)

0086-635-2970355(Int'l Dept)

网址/Web: www.hhbbearing.com

www.ok-bearing.com

E-mail: fkd.services@ok-bearing.com

河北海蓝轴承制造有限公司

HEBEI HAILAN BEARING MANUFACTURE CO.,LTD

公司简介 | Company profile

河北海蓝轴承制造有限公司（原邢台洪海轴承有限公司，创建于1988年），位于河北临西运河工业园区，地理位置优越，交通快捷。公司30年来专注于外球面轴承和各类轴承座的研发、生产和推广应用，是中国外球面带座轴承制造商和出口商之一。

公司现有员工500余人，各类工程技术人才50余人，公司占地65000m²，厂房建筑占地38000m²，拥有自动化轴承生产线和轴承座生产线。年产轴承超800万套，产品广泛应用于各类传动设备、矿山机械、工程机械、纺织机械、农业机械、林业机械、建筑机械等。

我们公司已通过ISO9001:2015质量管理体系认证。采用国际标准技术，以完善的制造工艺和现代化科技管理手段，为广大用户提供高质量产品。销售网络遍布全国各省，出口到世界68个国家和地区，与世界各地合作伙伴形成了长期的战略合作关系，在国内外建立了强大的营销网络和服务平台。

海蓝轴承大力倡导“团结、互助、合作、双赢”的企业文化，坚持以人为本，着力引进行业人才，强化员工培训，提高员工素质，增强企业竞争力。公司全体员工竭诚希望与海内外广大用户真诚合作，共图发展！

让我们在相识、合作、成功的道路上携手共进！您的需求就是我们的追求！

Hebei Hailan Bearing Manufacture Co.,Ltd (was originally founded in 1988 as Xingtai Honghai Bearing Manufacture Co.,Ltd) is one of the Chinese bearing manufacturers and exporters . It is the enterprise of well-know trademark of Hebei and high quality products of Hebei is located in the Hometown of Bearing in the LinXi county, HeBei Province, North of China,. We devote ourselves to research & development, production, promotion and application of Pillow block bearing and all other kinds of bearings .

There are more than 500 employees , Including 50 Technicians And Engineers in our group. And the area of land is 100000sqm (Plant is 65000+sqm) , We have Pillow Block Bearings automatic production line, automatic inspection line and Bearing Housing production line. We obedience to the operation philosophy of“differentiation kinds in product, technological modernization, manufactural professionalization, quality top grade, cost cheaper”, We have an annual production and sales of over 19 million pieces of Pillow Block Bearings , Deep Groove Ball Bearings, Taper Roller Bearings and all other kinds of bearings , our products are widely used in various types of transmission equipment, mining machinery, engineering machinery, textile machinery, agricultural machinery, forestry machinery, construction machinery as so on .


Our company has passed ISO9001:2015 quality management system certification. All of our production line adopt advanced specialized equipment, And over 90% of products were made by automatic equipment . Also we adopts the international standards for technical quality standards, advanced manufacturing processes and modern technology and management philosophy to provide customers with high quality products. Our three registered brand FE,FKD,HHB were well known in the over sea market . Over 90% of the products are exported to more than 68 countries and regions in the world. As one of the Chinese bearing exported enterprises, We have built the long-term strategic partnership with lots of customers around the world, establishing the strong marketing network and service platform in the domestic and over sea market.

Hailan bearing strongly advocates the corporate culture of "unity, mutual assistance, cooperation and win-win", adheres to the people-oriented Philosophy , and focuses on the introduction of professionals, strengthens staff training, improves staff quality, and enhances the competitiveness of the enterprise. All employees of the company sincerely hope to cooperate with all the clients in good faith to promote the common development !

Let's make progress together on the way of acquaintance, cooperation, succeeded !

Your demand is our pursuit!


we are single-minded, so we are speciality.

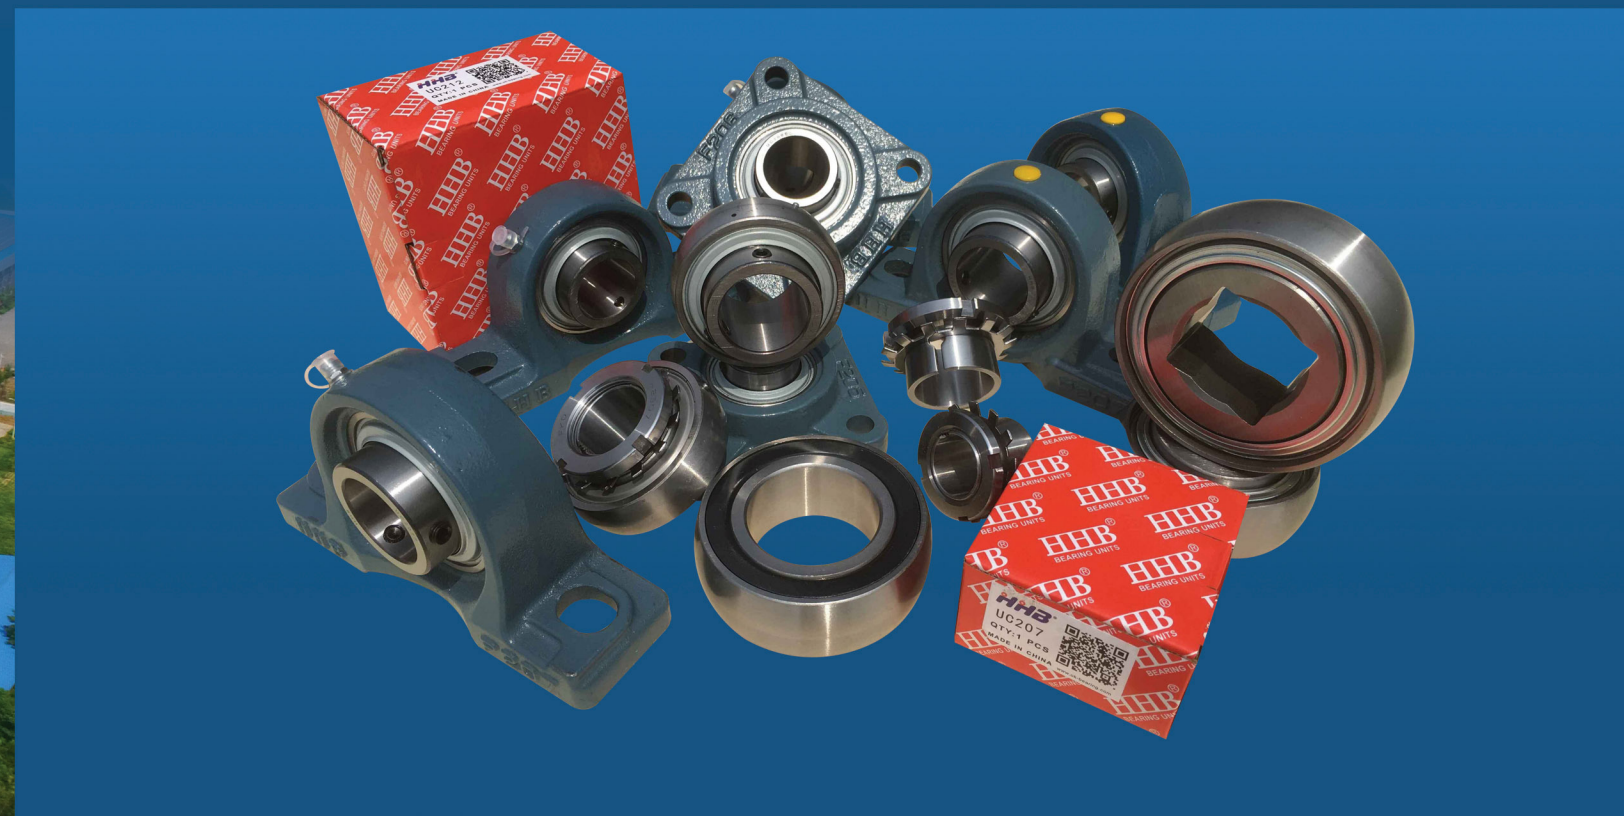



立式座
Pillow Blocks

UCP 200 (normal-duty)

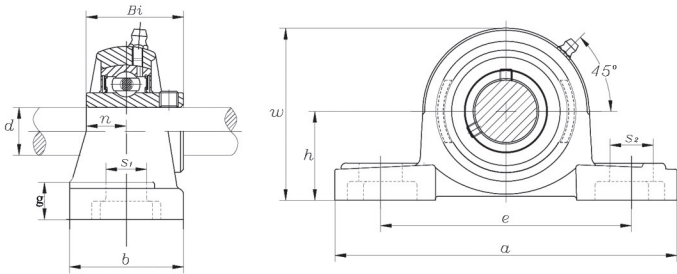


带座轴承代号 Bearing Unit No.	轴 径 Shaft Dia. d		外形尺寸(毫米) Dimensions (mm)										螺 栓 Bolt Used		Bearing No.	Housing No.	重量 Weight (kg)
	(in.)	(mm)	h	a	e	b	s ₂	s ₁	g	w	Bi	n	(mm)	(in.)			
UCP201 201-8	1/2	12	30.2	127	96	38	19	13	15	62	31	12.7	M10	3/8	UCP201 201-8	P201	0.61
UCP202 202-10	5/8	15	30.2	127	96	38	19	13	15	62	31	12.7	M10	3/8	UCP202 202-10	P202	0.59
UCP203 203-11	11/16	17	30.2	127	96	38	19	13	15	62	31	12.7	M10	3/8	UCP203 203-11	P203	0.58
UCP204 204-12	3/4	20	33.3	127	96	38	19	13	15	65	31	12.7	M10	3/8	UCP204 204-12	P204	0.66
UCP205-14 205-15 205-16	7/8 15/16 1	25	36.5	140	105	38	19	13	16	70	34.1	14.3	M10	3/8	UCP205-14 205-15 205-16	P205	0.81
UCP206-18 206-19 206-20	1 1/8 1 3/16 1 1/4	30	42.9	165	121	48	21	17	18	83	38.1	15.9	M14	1/2	UCP206-18 206-19 206-20	P206	1.25
UCP207-20 207-21 207-22 207-23	1 1/4 1 5/16 1 3/8 1 7/16	35	47.6	167	126	48	21	17	19	92	42.9	17.5	M14	1/2	UCP207-20 207-21 207-22 207-23	P207	1.58
UCP208-24 208-25 208	1 1/2 1 9/16	40	49.2	184	136	54	21	17	19	98	49.2	19.0	M14	1/2	UCP208-24 208-25 208	P208	1.9
UCP209-26 209-27 209-28 209	1 1/8 1 11/16 1 3/4	45	54	190	146	54	21	17	20	106	49.2	19.0	M14	1/2	UCP209-26 209-27 209-28 209	P209	2.14
UCP209-30 210-31 210 210-32	1 7/8 1 15/16 2	50	57.2	206	159	60	25	20	22	112	51.6	19.0	M16	5/8	UCP209-30 210-31 210 210-32	P210	2.67
UCP211-32 211-34 211 211-35	2 2 1/8 2 3/16	55	63.5	219	172	60	25	20	22	126	55.6	22.2	M16	5/8	UCP211-32 211-34 211 211-35	P211	3.3
UCP212-36 212 212-38 212-39	2 1/4 2 1/8 2 7/16	60	69.8	241	186	70	25	20	25	137	65.1	25.4	M16	5/8	UCP212-36 212 212-38 212-39	P212	4.9
UCP213-40 213	2 1/2	65	76.2	265	203	70	29	25	27	150	65.1	25.4	M20	3/4	UCP213-40 213	P213	5.4
UCP214-44 214	2 3/4	70	79.4	266	210	72	30	25	27	156	74.6	30.2	M20	3/4	UCP214-44 214	P214	6.2
UCP215 215-47 215-48	2 15/16 3	75	82.6	275	217	74	30	25	28	163	77.8	33.3	M20	3/4	UCP215 215-47 215-48	P215	7.16
UCP216 216-50	3 1/8	80	88.9	292	232	78	28	25	30	175	82.6	33.3	M20	3/4	UCP216 216-50	P216	8.1
UCP217-52 217 217-55	3 1/4 3 7/16	85	95.2	310	247	83	30	25	32	187	85.7	34.1	M20	3/4	UCP217-52 217 217-55	P217	9.81
UCP218-56 218	3 1/2	90	101.6	327	262	88	30	27	34	200	96.0	39.7	M22	7/8	UCP218-56 218	P218	12.2

立式座

Pillow Blocks

UCPX00 (medium-duty)

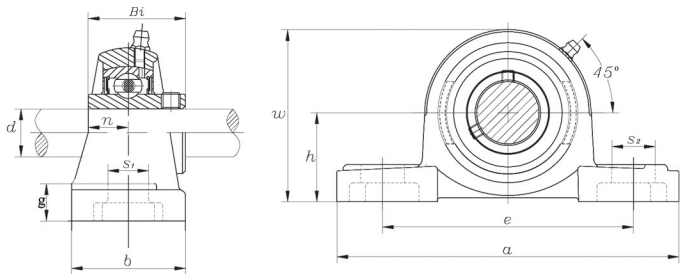


带座轴承代号 Bearing Unit No.	轴 径 Shaft Dia.		外形尺寸(毫米) Dimensions (mm)										螺 栓 Bolt Used		Bearing No.	Housing No.	重量 Weight (kg)
	d		h	a	e	b	s ₂	s ₁	g	w	B _i	n	(mm)	(in.)			
	(in.)	(mm)															
UCPX05 X05-14 X05-16	7/8 1	25	44.4	159	119	51	25	17	18	85	38.1	15.9	M14	1/2	UCX05 X05-14 X05-16	PX05	1.50
UCPX06 X06-18 X06-19 X06-20	1 1/8 1 3/16 1 1/4	30	47.6	175	127	57	25	17	20	94	42.9	17.5	M14	1/2	UCX06 X06-18 X06-19 X06-20	PX06	2.00
UCPX07-20 X07-22 X07 X07-23	1 1/4 1 3/8 1 7/16	35	54.0	203	144	57	30	17	22	105	49.2	19.0	M14	1/2	UCX07-20 X07-22 X07 X07-23	PX07	2.70
UCPX08-24 X08	1 1/2	40	58.7	222	156	67	32	20	26	113	49.2	19.0	M16	5/8	UCX08-24 X08	PX08	3.50
UCPX09-26 X09-27 X09-28 X09	1 5/8 1 11/16	45	58.7	222	156	67	33	20	26	116	51.6	19.0	M16	5/8	UCX09-26 X09-27 X09-28 X09	PX09	3.60
UCPX10-31 X10 X10-32	1 15/16 2	50	63.5	241	171	73	36	20	27	126	55.6	22.2	M16	5/8	UCX10-31 X10 X10-32	PX10	4.40
UCPX11 X11-32 X11-35 X11-36	2 2 3/16 2 1/4	55	69.8	260	184	79	36	25	30	139	65.1	25.4	M20	3/4	UCX11 X11-32 X11-35 X11-36	PX11	6.30
UCPX12 X12-36 X12-38 X12-39	2 1/4 2 3/8 2 7/16	60	76.2	286	203	83	41	25	32	152	65.1	25.4	M20	3/4	UCX12 X12-36 X12-38 X12-39	PX12	7.40
UCPX13-40 X13	2 1/2	65	76.2	286	203	83	41	25	32	154	74.6	30.2	M20	3/4	UCX13-40 X13	PX13	7.70
UCPX14-44 X14	2 3/4	70	88.9	330	229	89	51	27	35	171	77.8	33.3	M22	7/8	UCX14-44 X14	PX14	10.60
UCPX15 X15-47 X15-48	2 15/16 3	75	88.9	330	229	89	51	27	35	175	82.6	33.3	M22	7/8	UCX15 X15-47 X15-48	PX15	11.10
UCPX16 X16-50	3 1/8	80	101.6	381	283	102	59	27	42	195	85.7	34.1	M22	7/8	UCX16 X16-50	PX16	16.20
UCPX17 X17-52	3 1/4	85	101.6	381	283	102	60	27	45	200	96.0	39.7	M22	7/8	UCX17 X17-52	PX17	16.50
UCPX18-56 X18	3 1/2	90	101.6	381	283	111	60	27	45	204	104.0	42.9	M22	7/8	UCX18-56 X18	PX18	18.00
UCPX120 X20-64	4	100	127.0	432	337	121	64	33	52	245	117.5	49.2	M27	1	UCX120 X20-64	PX20	31.80

立式座

Pillow Blocks

UCP 300 (heavy-duty)

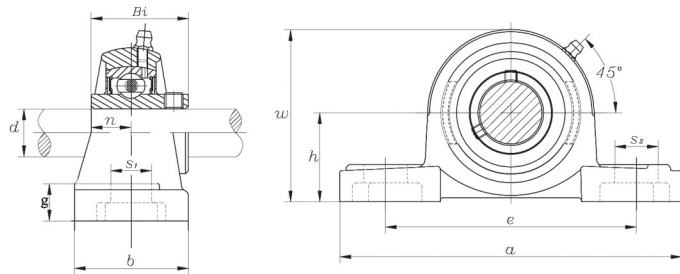


带座轴承代号 Bearing Unit No.	轴 径 Shaft Dia. d		外形尺寸(毫米) Dimensions(mm)										螺 栓 Bolt Used		Bearing No.	Housing No.	重量 Weight (kg)
	(in.)	(mm)	h	a	e	b	s ₂	s ₁	g	w	Bi	n	(mm)	(in.)			
UCP305 305-14 305-16	7/8 1	25	45	175	132	45	20	17	16	85	38	15	M14	1/2	UC305 305-14 305-16	P305	1.28
UCP306-18 306 306-19	1 1/8 1 3/16	30	50	180	140	50	20	17	18	95	43	17	M14	1/2	UC306-18 306 306-19	P306	1.72
UCP307-20 307-21 307 307-23	1 1/4 1 3/8 1 7/16	35	56	210	160	56	25	17	20	106	48	19	M14	1/2	UC307-20 307-21 307 307-23	P307	2.33
UCP308-24 308	1 1/2	40	60	220	170	60	27	17	22	116	52	19	M14	1/2	UC308-24 308	P308	3.01
UCP309-28 309	1 3/4	45	67	245	190	67	30	20	24	129	57	22	M16	5/8	UC309-28 309	P309	3.77
UCP310-31 310	1 15/16	50	75	275	212	75	35	20	27	143	61	22	M16	5/8	UC310-31 310	P310	5.47
UCP311-32 311	2	55	80	310	236	80	38	20	30	154	66	25	M16	5/8	UC311-32 311	P311	6.83
UCP312 312-36	2 1/4	60	85	330	250	85	38	25	32	165	71	26	M20	3/4	UC312 312-36	P312	8.15
UCP313-40 313	2 1/2	65	90	340	260	90	38	25	35	176	75	30	M20	3/4	UC313-40 313	P313	9.41
UCP314-44 314	2 3/4	70	95	360	280	90	40	27	35	187	78	33	M22	7/8	UC314-44 314	P314	11.08
UCP315 315-47 315-48	2 15/16 3	75	100	380	290	100	40	27	35	198	82	32	M22	7/8	UC315 315-47 315-48	P315	13.8
UCP316 316-50	3 1/8	80	106	400	300	110	40	27	40	210	86	34	M22	7/8	UC316 316-50	P316	16.2
UCP317 317-52	3 1/4	85	112	420	320	110	45	33	40	220	96	40	M27	1	UC317 317-52	P317	19.2
UCP318-56 318	3 1/2	90	118	430	330	110	45	33	45	235	96	40	M27	1	UC318-56 318	P318	21.1
UCP319		95	125	470	360	120	50	36	45	250	103	41	M30	1 1/8	UC319	P319	28.2
UCP320 320-64	4	100	140	490	380	120	50	36	50	275	108	42	M30	1 1/8	UC320 320-64	P320	34.8
UCP322		110	150	520	400	140	55	40	50	296	117	46	M33	1 1/4	UC322	P322	43.2
UCP324		120	160	570	450	140	55	40	50	316	126	51	M33	1 1/4	UC324	P324	54.0
UCP326		130	180	600	480	140	55	40	50	355	135	54	M33	1 1/4	UC326	P326	72.1
UCP328		140	200	620	500	140	55	40	60	393	145	59	M33	1 1/4	UC328	P328	91.2

方形座

UCF 200 (normal-duty)

Flange Units(Square)

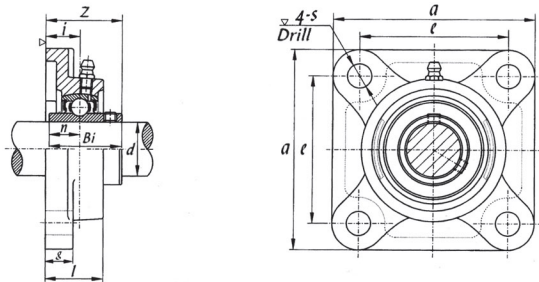


带座轴承代号 Bearing Unit No.	轴 径 Shaft Dia. d		外形尺寸(毫米) Dimensions(mm)									螺 栓 Bolt Used		Bearing No.	Housing No.	重量 Weight (kg)
	(in.)	(mm)	a	e	i	g	l	s	Z	Bi	n	(mm)	(in.)			
UCF201 201-8	1/2	12	86	64	15	12	25.5	12	33.3	31	12.7	M10	3/8	UC201 201-8	F201	0.59
UCF202 202-10	5/8	15	86	64	15	12	25.5	12	33.3	31	12.7	M10	3/8	UC202 202-10	F202	0.57
UCF203 203-11	11/16	17	86	64	15	12	25.5	12	33.3	31	12.7	M10	3/8	UC203 203-11	F203	0.56
UCF204-12 204	3/4	20	86	64	15	12	25.5	12	33.3	31	12.7	M10	3/8	UC204-12 204	F204	0.58
UCF205-14 205-15 205 205-16	7/8 15/16 1	25	95	70	16	14	27	12	35.8	34.1	14.3	M10	3/8	UC205-14 205-15 205 205-16	F205	0.8
UCF206-18 206 206-19 206-20	1 1/8 1 3/16 1 1/4	30	108	83	18	14	31	12	40.2	38.1	15.9	M10	3/8	UC206-18 206 206-19 206-20	F206	1.12
UCF207-20 207-21 207-22 207 207-23	1 1/4 1 5/16 1 3/8 1 7/16	35	117	92	19	16	34	14	44.4	42.9	17.5	M12	7/16	UC207-20 207-21 207-22 207 207-23	F207	1.46
UCF208-24 208-25 208	1 1/2 1 9/16	40	130	102	21	16	36	16	51.2	49.2	19.0	M14	1/2	UC208-24 208-25 208	F208	1.84
UCF209-26 209-27 209-28 209	1 5/8 1 11/16 1 3/4	45	137	105	22	18	38	16	52.2	49.2	19.0	M14	1/2	UC209-26 209-27 209-28 209	F209	2.15
UCF210-30 210-31 210 210-32	1 7/8 1 15/16 2	50	143	111	22	18	40	16	54.6	51.6	19.0	M14	1/2	UC210-30 210-31 210 210-32	F210	2.42
UCF211-32 211-34 211 211-35	2 2 1/8 2 3/16	55	162	130	25	20	43	19	58.4	55.6	22.2	M16	5/8	UC211-32 211-34 211 211-35	F211	3.31
UCF212-32 212 212-38 212-39	2 1/4 2 3/8 2 7/16	60	175	143	29	20	48	19	68.7	65.1	25.4	M16	5/8	UC212-32 212 212-38 212-39	F212	4.28
UCF213-40 213	2 1/2	65	187	149	30	20	50	19	69.7	65.1	25.4	M16	5/8	UC213-40 213	F213	4.99
UCF214-44 214	2 3/4	70	193	152	31	24	54	19	75.4	74.6	30.2	M16	5/8	UC214-44 214	F214	5.85
UCF215 215-47 215-48	2 15/16 3	75	200	159	34	24	56	19	78.5	77.8	33.3	M16	5/8	UC215 215-47 215-48	F215	6.91
UCF216 216-50	3 1/8	80	208	165	34	22	56	23	78	83.3	33.3	M20	3/4	UC216 216-50	F216	7.5
UCF217-52 217	3 1/4	85	220	175	36	26	63	23	87.6	85.7	34.1	M20	3/4	UC217-52 217	F217	9.66
UCF218-56 218	3 1/2	90	235	187	40	26	68	23	96.3	96.0	39.7	M20	3/4	UC218-56 218	F218	12.06

方形座

UCFX00 (medium-duty)

Flange Units(Square)

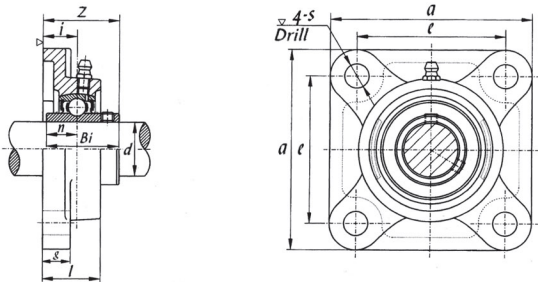


带座轴承代号 Bearing Unit No.	轴 径 Shaft Dia.		外形尺寸(毫米) Dimensions(mm)									螺 栓 Bolt Used		Bearing No.	Housing No.	重量 Weight (kg)
	d															
	(in.)	(mm)	a	e	i	g	l	s	Z	Bi	n	(mm)	(in.)			
UCFX05 X05-16	1	25	108	73	18	13	30	12	40.2	38.1	15.9	M10	3/8	UCX05 X05-16	FX05	1.1
UCFX06 X06-19 X06-20	1 3/16 1 1/4	30	117	92	19	14	34	16	44.4	42.9	17.5	M14	1/2	UCX06 X06-19 X06-20	FX05	1.4
UCFX07-20 X07-22 X07 X07-23	1 1/4 1 3/8 1 7/16	35	130	102	21	14	38	16	51.2	49.2	19.0	M14	1/2	UCX07-20 X07-22 X07 X07-23	FX07	1.9
UCFX08-24 X08	1 1/2	40	137	105	22	14	40	19	52.2	49.2	19.0	M16	5/8	UCX08-24 X08	FX08	2.1
UCFX09-26 X09-27 X09-28 X09	1 5/8 1 11/16 1 3/4	45	143	111	23	14	40	19	55.6	51.6	19.0	M16	5/8	UCX09-26 X09-27 X09-28 X09	FX09	2.5
UCFX10-30 X10-31 X10 X10-32	1 7/8 1 15/16 2	50	162	130	26	20	44	19	59.4	55.6	22.2	M16	5/8	UCX10-30 X10-31 X10 X10-32	FX10	3.6
UCFX11 X11-34 X11-35 X11-36	2 1/8 2 3/16 2 1/4	55	175	143	29	20	49	19	68.7	65.1	25.4	M16	5/8	UCX11 X11-34 X11-35 X11-36	FX11	4.7
UCFX12-36 X12 X12-38 X12-39	2 1/4 2 3/8 2 7/16	60	187	149	34	21	59	19	73.7	65.1	25.4	M16	5/8	UCX12-36 X12 X12-38 X12-39	FX12	5.5
UCFX13-40 X13	2 1/2	65	187	149	34	21	59	19	78.4	74.6	30.2	M16	5/8	UCX13-40 X13	FX13	5.9
UCFX14-44 X14	2 3/4	70	197	152	37	24	60	23	81.5	77.8	33.3	M20	3/4	UCX14-44 X14	FX14	7.3
UCFX15 X15-47 X15-48	2 15/16 3	75	197	152	40	24	68	23	89.3	82.6	33.3	M20	3/4	UCX15 X15-47 X15-48	FX15	8.0
UCFX16 X16-50	3 1/8	80	214	171	40	24	70	23	91.6	85.7	34.1	M20	3/4	UCX16 X16-50	FX16	9.8
UCFX17 X17-52	3 1/4	85	214	171	40	24	70	23	96.3	96.0	39.7	M20	3/4	UCX17 X17-52	FX17	10.5
UCFX18-56 X18	3 1/2	90	214	171	45	24	76	23	106.1	104.0	42.9	M20	3/4	UCX18-56 X18	FX18	11.2
UCFX20 X20-64	4	100	268	211	59	31	97	31	127.3	117.5	49.2	M27	1	UCX20 X20-64	FX20	18.1

方形座

Flange Units(Square)

UCF 300 (heavy-duty)

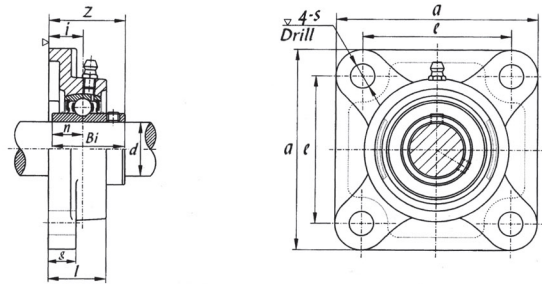


带座轴承代号 Bearing Unit No.	轴 径 Shaft Dia. d		外形尺寸(毫米) Dimensions (mm)									螺 栓 Bolt Used		Bearing No.	Housing No.	重量 Weight (kg)
	(in.)	(mm)	a	e	i	g	l	s	Z	Bi	n	(mm)	(in.)			
UCF305 305-16	1	25	110	80	16	13	29	16	39	38	15	14	1/2	UC305 305-16	305	1.20
UCF306-18 306 306-19	1 1/8 1 3/16	30	125	95	18	15	32	16	44	43	17	14	1/2	UC306-18 306 306-19	306	1.8
UCF307-20 307-22 307 307-23	1 1/4 1 3/8 1 7/16	35	135	100	20	16	36	19	49	48	19	16	5/8	UC307-20 307-22 307 307-23	307	2.20
UCF308-24 308	1 1/2	40	150	112	23	17	40	19	56	52	19	16	5/8	UC308-24 308	308	3.0
UCF309-28 309	1 3/4	45	160	125	25	18	44	19	60	57	22	16	5/8	UC309-28 309	309	3.8
UCF310-31 310 310-32	1 15/16 2	50	175	132	28	19	48	23	67	61	22	20	3/4	UC310-31 310 310-32	310	4.9
UCF311-32 311	2	55	185	140	30	20	52	23	71	66	25	20	3/4	UC311-32 311	311	5.6
UCF312 312-36	2 1/4	60	195	150	33	22	56	23	78	71	26	20	3/4	UC312 312-36	312	6.8
UCF313-40 313	2 1/2	65	208	166	33	22	58	23	78	75	30	20	3/4	UC313-40 313	313	7.8
UCF314-44 314	3/4	70	226	178	36	25	61	25	81	78	33	22	7/8	UC314-44 314	314	9.8
UCF315 315-47 315-48	2 15/16 3	75	236	184	39	25	66	25	89	82	32	22	7/8	UC315 315-47 315-48	315	11.6
UCF316 316-50	3 1/8	80	250	196	39	27	68	31	91	86	34	27	1	UC316 316-50	316	13.2
UCF317		85	260	204	44	27	74	31	100	96	40	27	1	UC317	317	15.2
UCF318-56 318	3 1/2	90	280	216	44	30	76	35	100	96	40	30	1 1/8	UC318-56 318	318	18.8
UCF319		95	290	228	59	30	94	35	121	103	41	30	1 1/8	UC319	319	21.1
UCF320 320-64	4	100	310	242	59	32	94	38	125	108	42	33	1 1/4	UC320 320-64	320	25.3
UCF322		110	340	266	60	35	96	41	131	117	46	36	1 3/8	UC322	322	35.0
UCF324		120	370	290	65	40	110	41	140	126	51	36	1 3/8	UC324	324	47.2
UCF326		130	410	320	65	45	115	41	146	135	54	36	1 3/8	UC326	326	64.1
UCF328		140	450	350	75	55	125	41	161	145	59	36	1 3/8	UC328	328	90.2

菱形座

Flange Units (Oval)


UCFL 200 (normal-duty)

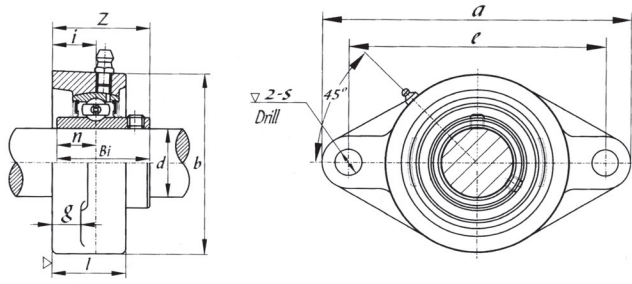

带座轴承代号 Bearing Unit No.	轴 径 Shaft Dia. d		外形尺寸(毫米) Dimensions(mm)											螺 栓 Bolt Used		Bearing No.	Housing No.	重量 Weight (kg)
	(in.)	(mm)	a	e	i	g	l	s	b	z	Bi	n	(mm)	(in.)				
UCFL201 201-8	1/2	12	113	90	15	11	25.5	12	60	33.3	31.0	12.7	M10	3/8	UC201 201-8	F201	0.44	
UCFL202 202-10	5/8	15	113	90	15	11	25.5	12	60	33.3	31.0	12.7	M10	3/8	UC202 202-10	F202	0.42	
UCFL203 203-11	11/16	17	113	90	15	11	25.5	12	60	33.3	31.0	12.7	M10	3/8	UC203 203-11	F203	0.41	
UCFL204-12 204	3/4	20	113	90	15	11	25.5	12	60	33.3	31.0	12.7	M10	3/8	UC204-12 204	F204	0.41	
UCFL205-14 205-15 205 205-16	7/8 15/16 1	25	130	99	16	13	27	16	68	35.7	34.1	14.3	M14	1/2	UC205-14 205-15 205 205-16	F205	0.61	
UCFL206-18 206 206-19 206-20	1 1/8 1 3/16 1 1/4	30	148	117	18	13	31	16	80	40.2	38.1	15.9	M14	1/2	UC206-18 206 206-19 206-20	F206	0.87	
UCFL207-20 207-21 207-22 207 207-23	1 1/4 1 5/16 1 3/8 1 7/16	35	161	130	19	14	34	16	90	44.4	42.9	17.5	M14	1/2	UC207-20 207-21 207-22 207 207-23	F207	1.2	
UCFL208-24 208-25 208	1 1/2 1 9/16	40	175	144	21	14	36	16	100	51.2	49.2	19.0	M14	1/2	UC208-24 208-25 208	F208	1.45	
UCFL209-26 209-27 209-28 209	1 5/8 1 11/16 1 3/4	45	188	148	22	15	38	19	108	52.2	49.2	19.0	M16	5/8	UC209-26 209-27 209-28 209	F209	1.81	
UCFL210-30 210-31 210 210-32	1 7/8 1 15/16 2	50	197	157	22	15	40	19	115	54.6	51.	19.0	M16	5/8	UC210-30 210-31 210 210-32	F210	2.14	
UCFL211-32 211-34 211 211-35	2 2 1/8 2 3/16	55	224	184	25	18	43	19	130	58.4	55.6	22.2	M16	5/8	UC211-32 211-34 211 211-35	F211	2.9	
UCFL212-36 212 212-38 212-39	2 1/4 2 3/8 2 7/16	60	250	202	29	18	48	23	140	68.7	65.1	25.4	M20	3/4	UC212-36 212 212-38 212-39	F212	3.96	
UCFL213-40 213	2 1/2	65	258	210	30	20	50	23	155	69.7	65.1	25.4	M20	3/4	UC213-40 213	F213	4.37	
UCFL214-44 214	2 3/4	70	265	216	31	20	54	23	160	75.4	74.6	30.2	M20	3/4	UC214-44 214	F214	4.95	
UCFL215 215-48	3	75	275	225	34	20	56	23	165	78.5	77.8	33.3	M20	3/4	UC215 215-48	F215	5.18	
UCFL216 216-50	3 1/8	80	290	233	34	20	58	25	180	83.3	82.6	33.3	M20	3/4	UC216 216-50	F216	6.36	
UCFL217-52 217	3 1/4	85	305	248	36	22	63	25	190	87.6	85.7	34.1	M20	3/4	UC217-52 217	F217	7.68	
UCFL218-56 218	3 1/2	90	320	265	40	23	68	25	205	96.3	96	39.7	M20	3/4	UC218-56 218	F218	9.54	

菱形座
Flange Units (Oval)


UCFLX00 (medium-duty)

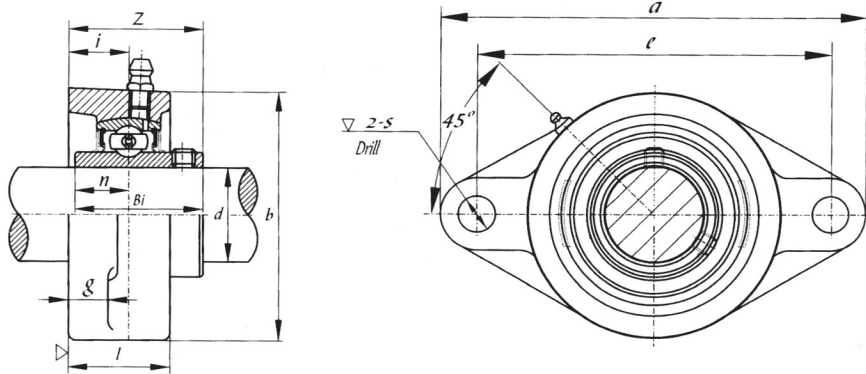

带座轴承代号 Bearing Unit No.	轴 径 Shaft Dia.		外形尺寸(毫米) Dimensions (mm)										螺 栓 Bolt Used		Bearing No.	Housing No.	重量 Weight (kg)
	d																
	(in.)	(mm)	a	e	i	g	l	s	b	z	Bi	n	(mm)	(in.)			
UCFLX05															UCX05		
X05-14	7/8	25	141	117	18	13	30	12	83	40.2	38.1	15.9	M10	3/8	X05-14	FLX05	1.0
X05-16	1														X05-16		
UCFLX06															UCX06		
X06-18	1 1/16	30	155	130	19	14	34	16	95	44.4	42.9	17.5	M14	1/2	X06-18	FLX06	1.4
X06-19	1 3/16														X06-19		
X06-20	1 1/4														X06-20		
UCFLX07-20	1 1/4														UCX07-20		
X07-22	1 3/8	35	171	144	21	14	38	16	105	51.2	49.2	19.0	M14	1/2	X07-22	FLX07	1.9
X07															X07		
X07-23	1 7/16														X07-23		
UCFLX08-24	1 1/2														UCX08-24		
X08		40	179	148	22	14	40	16	111	52.2	49.2	19.0	M14	1/2	X08	FLX08	2.0
UCFLX09-26	1 5/8														UCX09-26		
X09-27	1 11/16	45	189	157	23	14	40	16	116	55.6	51.6	19.0	M14	1/2	X09-27	FLX09	2.4
X09-28	1 3/4														X09-28		
X09															X09		
UCFLX10-31	1 15/16														UCX10-31		
X10		50	216	184	26	20	44	19	133	59.4	55.6	22.2	M16	5/8	X10	FLX10	3.7
X10-32	2														X10-32		

菱形座
Flange Units (Oval)

UCFL 300 (heavy-duty)

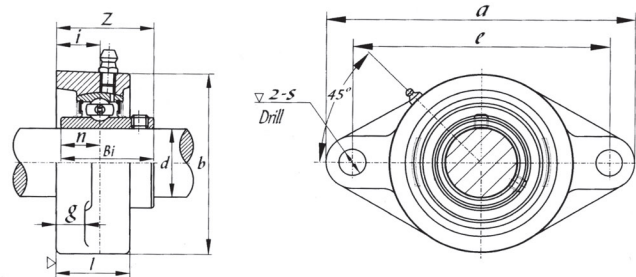


带座轴承代号 Bearing Unit No.	轴 径 Shaft Dia.		外形尺寸(毫米) Dimensions(mm)										螺 栓 Bolt Used		Bearing No.	Housing No.	重量 Weight (kg)
	d																
	(in.)	(mm)	a	e	i	g	l	s	b	z	Bi	n	(mm)	(in.)			
UCFL305 305-16	1	25	150	113	16	13	29	19	80	39	38	15	M16	5/8	UC305 305-16	FL305	1. 1
UCFL306-18 306 306-20	1 1/8	30	180	134	18	15	32	23	90	44	43	17	M20	3/4	UC306-18 306 306-20	FL306	1. 5
	1 1/4																
UCFL307-20 307-22 307 307-23	1 1/4	35	185	141	20	16	36	23	100	49	48	19	M20	3/4	UC307-20 307-22 307 307-23	FL307	1. 8
	1 3/8																
	1 7/16																
UCFL308-24 308	1 1/2	40	200	158	23	17	40	23	112	56	52	19	M20	3/4	UC308-24 308	FL308	2. 4
UCFL309-28 309	1 3/4	45	230	177	25	18	44	25	125	60	57	22	M22	7/8	UC309-28 309	FL309	3. 4
UCFL310-31 310 310-32	1 15/16	50	240	187	28	19	48	25	140	67	61	22	M22	7/8	UC310-31 310 310-32	FL310	4. 3
	2																
UCFL311-32 311	2	55	250	198	30	20	52	25	150	71	66	25	M22	7/8	UC311-32 311	FL311	5. 2
UCFL312 312-36	2 1/4	60	270	212	33	22	56	31	160	78	71	26	M27	1	UC312 312-36	FL312	6. 3
UCFL313-40 313	2 1/2	65	295	240	33	25	58	31	175	78	75	30	M27	1	UC313-40 313	FL313	7. 9
UCFL314-44 314	2 3/4	70	315	250	36	28	61	35	185	81	78	33	M30	1 1/8	UC314-44 314	FL314	9. 3
UCFL315 315-48	3	75	320	260	39	30	66	35	195	89	82	32	M30	1 1/8	UC315 315-48	FL315	10. 6
UCFL316 316-50	3 1/8	80	355	285	38	32	68	38	210	90	86	34	M33	1 1/4	UC316 316-50	FL316	13. 5
UCFL317 317-52	3 1/4	85	370	300	44	32	74	38	220	100	96	40	M33	1 1/4	UC317 317-52	FL317	15. 2
UCFL318-56 318	3 1/2	90	385	315	44	36	76	38	235	100	96	40	M33	1 1/4	UC318-56 318	FL318	18. 0
UCFL319		95	405	330	59	40	94	41	250	121	103	41	M36	1 3/8	UC319	FL319	22. 7
UCFL320 320-64	4	100	440	360	59	40	94	44	270	125	108	42	M39	1 1/2	UC320 320-64	FL320	27. 2
UCFL322		110	470	390	60	42	96	44	300	131	117	46	M39	1 1/2	UC322	FL322	34. 2
UCFL324		120	520	430	65	48	110	47	330	140	126	51	M42	1 5/8	UC324	FL324	48. 1
UCFL326		130	550	460	65	50	115	47	360	146	135	54	M42	1 5/8	UC326	FL326	59. 5
UCFL328		140	600	500	75	60	125	51	400	161	145	59	M45	1 3/4	UC328	FL328	73. 5

滑块座

Take-up Units
(normal-duty)

UCST 200 (wide inch slot)

UCT 200 (narrow metric slot)

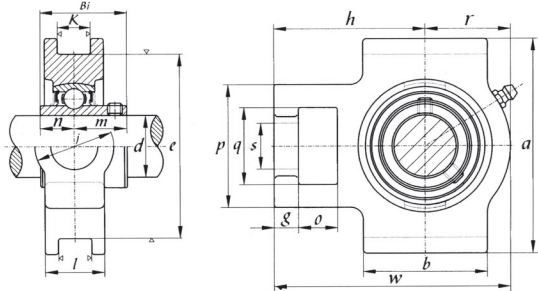


带座轴承代号 Bearing Unit No.	轴 径 Shaft Dia. (in.)	外形尺寸(毫米) Dimensions (mm)															Bearing No.	Housing No.	重量 Weight (kg)
		o	g	p	q	s	b	k	e	a	w	j	l	h	Bi	n			
UCST204-12	3/4	5/8	13/32	2	1 1/4	3/4	2	17/32	2 63/64	3 1/2	3 11/16	1 1/4	15/16	2 13/32	1.220	0.500	UC204-12	ST204	1.85
UCST205-14 205-15 205-16	7/8 15/16 1	5/8	13/32	2	1 1/4	3/4	2	17/32	2 63/64	3 1/2	3 11/16	1 1/4	15/16	2 7/16	1.3386	0.563	UC205-14 205-15 205-16	ST205	1.78
UCST206-17 206-18 206-19 206-20	1 1/16 1 1/8 1 3/16 1 1/4	5/8	13/32	2 7/32	1 15/32	55/64	2 1/4	17/32	3 1/2	4 1/32	4 7/16	1 15/32	1 3/32	2 3/4	1.500	0.626	UC206-17 206-18 206-19 206-20	ST206	2.42
UCST207-20 207-21 207-22 207-23	1 1/4 1 5/16 1 3/8 1 7/16	5/8	1/2	2 17/32	1 15/32	55/64	2 17/32	17/32	3 1/2	4 1/32	5 3/32	1 15/32	1 3/16	3 1/16	1.689	0.689	UC207-20 207-21 207-22 207-23	ST207	3.53
UCST208-24 208-25	1 1/2 1 9/16	3/4	5/8	3 9/32	1 15/32	1 9/64	3 9/32	11/16	4 1/64	4 1/2	5 21/32	1 5/16	1 5/16	3 15/32	1.937	0.748	UC208-24 208-25	ST208	5.30
UCST209-26 209-27 209-28	1 5/8 1 11/16 1 3/4	3/4	5/8	3 9/32	1 15/16	1 9/64	3 9/32	11/16	41/64	4 19/32	5 21/32	1 15/16	1 3/8	3 7/16	1.937	0.748	UC209-26 209-27 209-28	ST209	5.30
UCST210-30 210-31 210-32	1 7/8 1 15/16 2	3/4	5/8	3 9/32	1 15/16	1 9/64	3 3/8	11/16	4 1/64	4 19/32	5 7/8	1 15/16	1 15/32	3 17/32	2.031	0.748	UC210-30 210-31 210-32	ST210	5.40
UCST211-32 211-34 211-35	2 2 1/8 2 3/16	1	3/4	4 1/32	2 17/32	1 3/8	3 3/4	1 1/16	5 1/8	5 3/4	6 23/32	2 17/32	1 1/2	4 3/16	2.189	0.874	UC211-32 211-34 211-35	ST211	9.04
UCST212-36 212-38 212-39	2 1/4 2 3/8 2 7/16	1 1/4	3/4	4 1/32	2 17/32	1 3/8	4 1/32	1 1/16	5 1/8	5 3/4	7 5/8	2 17/32	1 21/32	4 11/16	2.563	1.000	UC212-36 212-38 212-39	ST212	11.0
UCST213-40	2 1/2	1 1/4	13/16	4 3/8	2 3/4	1 39/64	4 3/4	1 1/16	5 15/16	6 9/16	8 13/16	2 3/4	1 23/32	5 13/32	2.563	1.000	UC213-40	ST213	15.5

带座轴承代号 Bearing Unit No.	轴 径 Shaft Dia. (in.)	外形尺寸(毫米) Dimensions(mm)																Bearing No.	Housing No.	重量 Weight (kg)
		o	g	p	q	s	b	k	e	a	w	j	l	h	Bi	n				
UCT201	12	16	10	51	32	19	51	12	76	89	94	32	21	61	31	12.7	UC201	T204	0.75	
UCT202	15	16	10	51	32	19	51	12	76	89	94	32	21	61	31	12.7	UC202	T204	0.73	
UCT203	17	16	10	51	32	19	51	12	76	89	94	32	21	61	31	12.7	UC203	T204	0.72	
UCT204	20	16	10	51	32	19	51	12	76	89	94	32	21	61	31	12.7	UC204	T204	0.70	
UCT205	25	16	10	51	32	19	51	12	76	89	97	32	24	62	34	14.3	UC205	T205	0.73	
UCT206	30	16	10	56	37	22	57	12	89	102	113	37	28	70	38.1	15.9	UC206	T206	1.17	
UCT207	35	16	13	64	37	22	64	12	89	102	129	37	30	78	42.9	17.5	UC207	T207	1.45	
UCT208	40	19	16	83	49	29	83	16	102	114	144	49	33	88	49.2	19	UC208	T208	2.11	
UCT209	45	19	16	83	49	29	83	16	102	117	144	49	35	87	49.2	19	UC209	T209	2.18	
UCT210	50	19	16	83	49	29	86	16	102	117	149	49	37	90	51.6	19	UC210	T210	2.35	
UCT211	55	25	19	102	64	35	95	22	130	146	171	64	38	106	55.6	22.2	UC211	T211	3.56	
UCT212	60	32	19	102	64	35	102	22	130	146	194	64	42	119	65.1	25.4	UC212	T212	4.23	
UCT213	65	32	21	111	70	41	121	26	151	167	224	70	44	137	65.1	25.4	UC213	T213	6.04	
UCT214	70	32	21	111	70	41	121	26	151	167	224	70	46	137	74.6	30.2	UC214	T214	6.35	
UCT215	75	32	21	111	70	41	121	26	151	167	232	70	48	140	77.8	33.3	UC215	T215	6.60	
UCT216	80	32	21	111	70	41	121	26	165	184	235	70	51	140	82.6	33.3	UC216	T216	7.24	
UCT217	85	38	29	124	73	48	157	30	173	198	260	73	54	162	85.7	34.1	UC217	T217	10.33	

滑块座

Take-up Units

UCT 300 (heavy-duty)

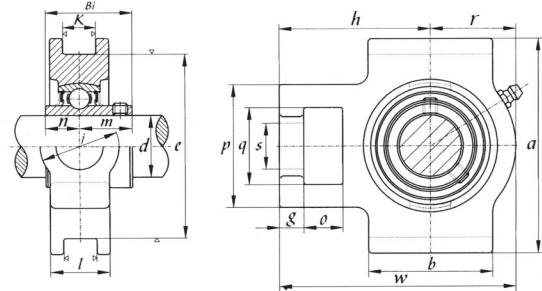


带座轴承代号 Bearing Unit No.	轴 径 Shaft Dia. d		外形尺寸(毫米) Dimensions (mm)																		Bearing No.	Housing No.	重量 Weight (kg)
	(in.)	(mm)	o	g	p	q	i	s	b	k	e	a	w	j	l	r	h	Bi	n	m			
UCT305 305-16 305-18	1 1 1/8	25	16	12	62	36	26	65	12	80	89	122	36	26	46	76	38	15	23		UC305 305-16 305-18	T305	1.4
UCT306 306-19	1 3/16	30	18	14	70	41	28	74	16	90	100	137	41	28	52	85	43	17	26		UC306 306-19	T306	1.8
UCT307-20 307-22 307 307-23	1 1/4 1 3/8 1 7/16	35	20	15	75	45	30	80	16	100	111	150	45	32	56	94	48	19	29		UC307-20 307-22 307 307-23	T307	2.3
UCT308-24 308	1 1/2	40	22	17	83	50	32	89	18	112	124	162	50	34	62	100	52	19	33		UC308-24 308	T308	3.0
UCT309-28 309	1 3/4	45	24	18	90	55	34	97	18	125	138	138	55	38	68	110	57	22	35		UC309-28 309	T309	4.1
UCT310-30 310-31 310 310-32	1 7/8 1 15/16 2	50	27	20	98	61	37	106	20	140	151	191	61	40	74	117	61	22	39		UC310-30 310-31 310 310-32	T310	4.9
UCT311-32 311	2	55	29	21	105	66	39	115	22	150	163	207	66	44	80	127	66	25	41		UC311-32 311	T311	6.1
UCT312 312-36	2 1/4	60	31	23	113	71	41	123	22	160	178	220	71	46	85	135	71	26	45		UC312 312-36	T312	7.6
UCT313-40 313	2 1/2	65	32	25	116	70	43	134	26	170	190	238	80	50	92	146	75	30	45		UC313-40 313	T313	9.3
UCT314-44 314	2 3/4	70	36	25	130	85	46	140	26	180	202	252	90	52	97	155	78	33	45		UC314-44 314	T314	11.1
UCT315 315-48	3	75	36	25	132	85	46	150	26	192	216	262	90	55	102	160	82	32	50		UC315 315-48	T315	13
UCT316 316-50	3 1/8	80	42	28	150	98	53	160	30	204	230	282	102	60	108	174	86	34	52		UC316 316-50	T316	16.2
UCT317 317-52	3 1/4	85	42	30	152	98	53	170	32	21	240	298	102	64	115	183	96	40	56		UC317 317-52	T317	19
UCT318-56 318	3 1/2	90	46	30	160	106	57	175	32	228	255	312	110	66	120	192	96	40	56		UC318-56 318	T318	21.6
UCT319		95	46	31	165	106	57	180	35	240	270	322	110	72	125	197	103	41	62		UCT319	T319	24.9
UCT320 320-64	4	100	48	32	175	115	59	200	35	260	290	345	120	75	135	210	108	42	66		UC320 320-64	T320	30.7
UCT322		110	52	38	185	125	65	215	38	285	320	385	130	80	150	235	117	46	71		UCT322	T322	39.7
UCT324		120	60	42	210	140	70	230	45	320	355	432	140	90	165	267	126	51	75		UCT324	T324	54.4
UCT326		130	65	45	220	150	75	240	50	350	385	465	150	100	180	285	135	54	81		UCT326	T326	69.3
UCT328		140	70	50	230	160	80	255	50	380	415	515	155	100	200	315	145	59	86		UCT328	T328	85.1

凸台圆形座

UCFC 200 (normal-duty)

Flang Cartridge Units

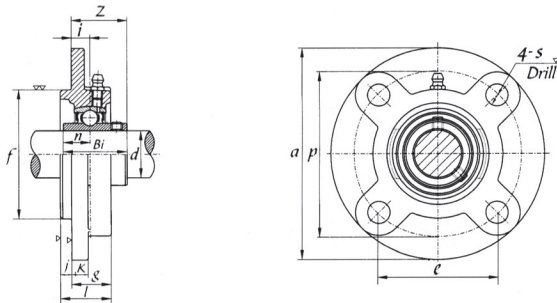


带座轴承代号 Bearing Unit No.	轴 径 Shaft Dia. d		外形尺寸(毫米) Dimensions (mm)													螺 栓 Bolt Used		Bearing No.	Housing No.	重量 Weight (kg)
	(in.)	(mm)	a	p	e	i	l	s	j	k	g	f	z	Bi	n	(mm)	(in.)			
UCFC201 201-8	1/2	12	100	78	55.1	10	25.5	12	5	7	20.5	62	28.3	31.0	12.7	M10	3/8	UC201 201-8	FC201	0.71
UCFC202 202-10	5/8	15	100	78	55.1	10	25.5	12	5	7	20.5	62	28.3	31.0	12.7	M10	3/8	UC202 202-10	FC202	0.69
UCFC203 203-11	11/16	17	100	78	55.1	10	25.5	12	6	7	20.5	62	28.3	31.0	12.7	M10	3/8	UC203 203-11	FC203	0.68
UCFC204-12 204	3/4	20	100	78	55.1	10	25.5	12	6	7	20.5	62	28.3	31.0	12.7	M10	3/8	UC204-12 204	FC204	0.66
UCFC205-14 205-15 205 205-16	7/8 15/16 1	25	115	90	63.6	10	27	12	6	7	21	70	29.7	34.1	14.3	M10	3/8	UC205-14 205-15 205 205-16	FC205	0.92
UCFC206-18 206 206-19 206-20	1 1/8 1 3/16 1 1/4	30	125	100	70.7	10	31	12	8	8	23	80	32.2	38.1	15.9	M10	3/8	UC206-18 206 206-19 206-20	FC206	1.21
UCFC207-20 207-21 207-22 207 207-23	1 1/4 1 5/16 1 3/8 1 7/16	35	135	110	77.8	11	34	14	8	9	26	90	36.4	42.9	17.5	M12	7/16	UC207-20 207-21 207-22 207 207-23	FC207	1.50
UCFC208-24 208-25 208	1 1/2 1 9/16	40	145	120	84.8	11	36	14	10	9	26	100	41.2	49.2	19.0	M12	7/16	UC208-24 208-25 208	FC208	1.87
UCFC209-26 209-27 209-28 209	1 5/8 1 11/16 1 3/4	45	160	132	93.3	10	38	16	12	14	26	105	40.2	49.2	19.0	M14	1/2	UC209-26 209-27 209-28 209	FC209	2.34
UCFC210-30 210-31 210	1 7/8 1 15/16	50	165	138	97.6	10	40	16	12	14	28	110	42.6	51.6	19.0	M14	1/2	UC210-30 210-31 210	FC210	2.72
UCFC211-32 211-34 211 211-35	2 2 1/8 2 3/16	55	185	150	106.1	13	43	19	12	15	31	125	46.4	55.6	22.2	M16	5/8	UC211-32 211-34 211 211-35	FC211	3.66
UCFC212-36 212 212-38 212-39	2 1/4 2 3/8 2 7/16	60	195	160	113.1	17	48	19	12	60	36	135	56.7	65.1	25.4	M16	5/8	UC212-36 212 212-38 212-39	FC212	4.58
UCFC213-40 213	2 1/2	65	205	170	120.0	16	50	19	14	15	36	145	55.7	65.1	25.4	M16	5/8	UC213-40 213	FC213	5.07
UCFC214-44 214	2 3/4	70	215	177	125.1	17	54	19	14	18	40	150	61.4	74.6	30.2	M16	5/8	UC214-44 214	FC214	6.15
UCFC215 215-48	3	75	220	184	130.1	18	56	19	16	18	40	160	62.5	77.8	33.3	M16	5/8	UC215 215-48	FC215	6.79
UCFC216		80	240	200	141.4	18	58	23	16	18	18	170	67.3	82.6	33.3	M20	3/4	UC216	FC216	8.01
UCFC217-52 217	3 1/4	85	250	208	147.1	18	63	23	18	20	45	180	69.6	85.7	34.1	M20	3/4	UC217-52 217	FC217	9.18
UCFC218-56 218	3 1/2	90	265	220	155.5	22	68	23	18	20	50	190	78.3	96.0	39.7	M20	3/4	UC218-56 218	FC218	11.3

高中心立式座

UCPH 200 (normal-duty)

Pillow Blocks
(High center height)

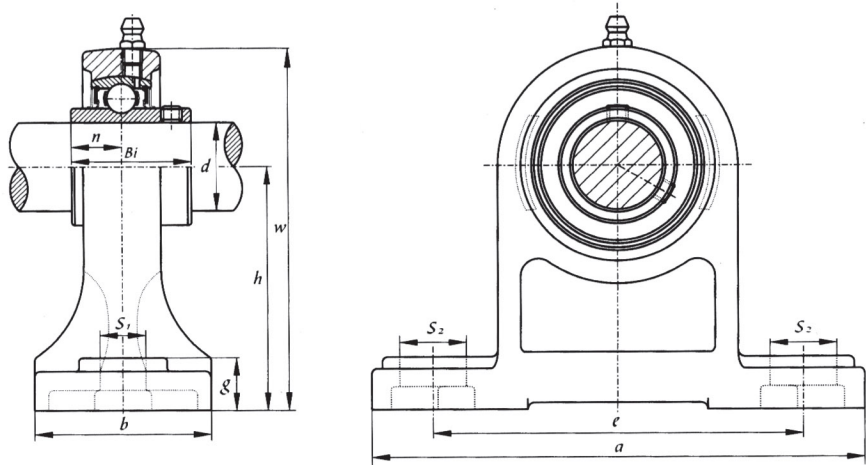


带座轴承代号 Bearing Unit No.	轴 径 Shaft Dia. d		外形尺寸(毫米) Dimensions (mm)										螺 栓 Bolt Used		Bearing No.	Housing No.	重量 Weight (kg)
	(in.)	(mm)	h	a	e	b	s ₂	s ₁	g	w	Bi	n	(mm)	(in.)			
UCPH201 201-8	1/2	12	70	127	95	40	19	13	15	101	31.0	12.7	M10	3/8	UC201 201-8	PH201	0.96
UCPH202 202-10	5/8	15	70	127	95	40	19	13	15	101	31.0	12.7	M10	3/8	UC202 202-10	PH202	0.96
UCPH203 203-11	11/16	17	70	127	95	40	19	13	15	101	31.0	12.7	M10	3/8	UC203 203-11	PH203	0.96
UCPH204-12 204	3/4	20	70	127	95	40	19	13	15	101	31.0	12.7	M10	3/8	UC204-12 204	PH204	0.96
UCPH205-14 205-15 205 205-16	7/8 15/16 1	25	80	140	105	50	19	13	16	114	34.1	14.3	M10	3/8	UC205-14 205-15 205 205-16	PH205	1.2
UCPH206-18 206 206-19 206-20	1 1/8 1 3/16 1 1/4	30	90	165	121	50	21	17	18	130	38.1	15.9	M14	1/2	UC206-18 206 206-19 206-20	PH206	1.6
UCPH207-20 207-21 207-22 207 207-23	1 1/4 1 5/16 1 3/8 1 7/16	35	95	167	127	60	21	17	18	140	42.9	17.5	M14	1/2	UC207-20 207-21 207-22 207 207-23	PH207	2.0
UCPH208-24 208-25 208	1 1/2 1 9/16	40	100	184	137	70	21	17	20	150	49.2	19.0	M14	1/2	UC208-24 208-25 208	PH208	2.7
UCPH209-26 209-27 209-28 209	1 5/8 1 11/16 1 3/4	45	105	190	146	70	21	17	20	158	49.2	19.0	M14	1/2	UC209-26 209-27 209-28 209	PH209	3.0
UCPH210-30 210-31 210 210-32	1 7/8 1 15/16 2	50	110	206	159	70	22	20	22	165	51.6	19.0	M16	5/8	UC210-30 210-31 210 210-32	PH210	3.5

高中心立式座

Top-based Pillow Blocks

UCPA 200 (normal-duty)

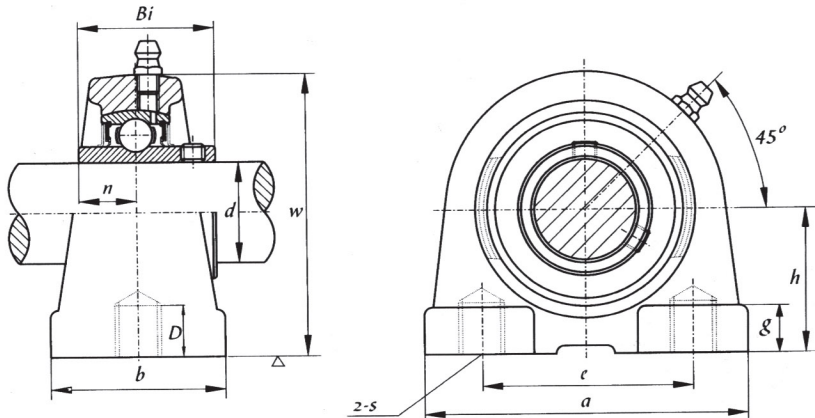


带座轴承代号 Bearing Unit No.	轴 径 Shaft Dia.		外形尺寸(毫米) Dimensions(mm)										螺 栓 Bolt size (mm)	Bearing No.	Housing No.	重量 Weight (kg)
	d															
	(in.)	(mm)	h	a	e	b	s (mm)	g	w	D	Bi	n				
UCPA201 201-8	1/2	12	30.2	76	52	40	10	11	62	13	31.0	12.7	M10	UC201 201-8	PA201	0.56
UCPA202 202-10	5/8	15	30.2	76	52	40	10	11	62	13	31.0	12.7	M10	UC202 202-10	PA202	0.54
UCPA203 203-11	11/16	17	30.2	76	52	40	10	11	62	13	31.0	12.7	M10	UC203 203-11	PA203	0.53
UCPA204-12 204	3/4	20	30.2	76	52	40	10	11	62	13	31.0	12.7	M10	UC204-12 204	PA204	0.51
UCPA205-14 205-15 205 205-16	7/8 15/16 1	25	36.5	84	56	45	10	12	72	13	34.0	14.3	M10	UC205-14 205-15 205 205-16	PA205	0.68
UCPA206-18 206 206-19	1 1/8 1 3/16	30	42.9	94	66	50	14	12	84	18	38.1	15.9	M14	UC206-18 206 206-19	PA206	0.99
UCPA207-20 207-21 207-22 207 207-23	1 1/4 1 5/16 1 3/8 1 7/16	35	47.6	110	80	55	14	13	95	20	42.9	17.5	M14	UC207-20 207-21 207-22 207 207-23	PA207	1.42
UCPA208-24 208-25 208	1 1/2 1 9/16	40	49.2	116	84	58	14	13	100	20	49.2	19.0	M14	UC208-24 208-25 208	PA208	1.64
UCPA209-26 209-27 209-28 209	1 5/8 1 11/16 1 3/4	45	54.2	120	90	60	14	13	100	25	49.2	19.0	M14	UC209-26 209-27 209-28 209	PA209	1.80
UCPA210-30 210-31 210 210-32	1 7/8 1 15/16 2	50	57.5	130	94	64	16	14	116	25	51.6	19.0	M16	UC210-30 210-31 210 210-32	PA210	2.23

可调菱形座

Adjustable Flange Units


UCFA 200 (normal-duty)

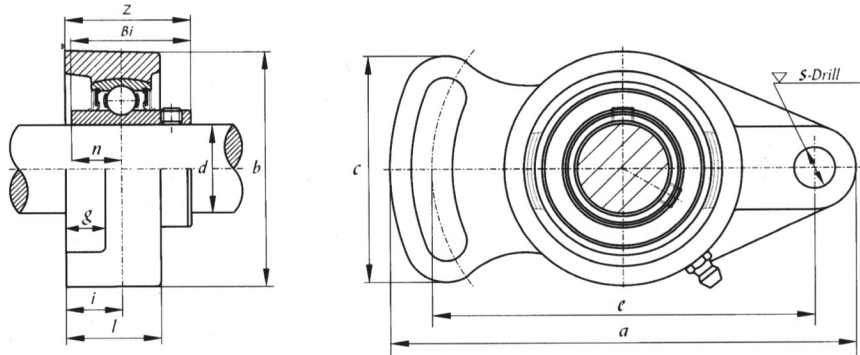

带座轴承代号 Bearing Unit No.	轴 径 Shaft Dia.		外形尺寸(毫米) Dimensions (mm)												螺 栓 Bolt Used		Bearing No.	Housing No.	重量 Weight (kg)
	d																		
	(in.)	(mm)	a	e	i	g	l	s	b	z	c	Bi	n	(mm)	(in.)				
UCFA201 201-8	1/2	12	98	78	15	11	25.5	10	60	33.3	50	31.0	12.7	M8	5/16	UC201 201-8	FA201	0.47	
UCFA202 202-10	5/8	15	98	78	15	11	25.5	10	60	33.3	50	31.0	12.7	M8	5/16	UC202 202-10	FA202	0.47	
UCFA203 203-11	11/16	17	98	78	15	11	25.5	10	60	33.3	50	31.0	12.7	M8	5/16	UC203 203-11	FA203	0.47	
UCFA204-12 204	3/4	20	98	78	15	11	25.5	10	60	33.3	50	31.0	12.7	M8	5/16	UC204-12 204	FA204	0.47	
UCFA205-14 205-15 205 205-16	7/8 15/16 1	25	124	98	16.0	13	27	12	70	35.7	65	34.1	14.3	M10	3/8	UC205-14 205-15 205 205-16	FA205	0.68	
UCFA206-18 206 206-19 206-20	1 1/8 1 3/16 1 1/4	30	141	117	18	13	31	12	83	40.2	72	38.1	15.9	M10	3/8	UC206-18 206 206-19 206-20	FA206	1.0	
UCFA207-20 207-21 207-22 207 207-23	1 1/4 1 5/16 1 3/8 1 7/16	35	155	130	19	14	34	14	96	44.4	82	42.9	17.5	M12	7/16	UC207-20 207-21 207-22 207 207-23	FA207	1.4	
UCFA208-24 208-25 208	1 1/2 1 9/16	40	171	144	21	16	36	14	105	51.2	87	49.2	19	M12	7/16	UC208-24 208-25 208	FA208	1.7	
UCFA209-26 209-27 209-28 209	1 5/8 1 11/16 1 3/4	45	179	148	22	16	38	16	111	52.2	90	49.2	19	M14	1/2	UC209-26 209-27 209-28 209	FA209	2.1	
UCFA210-30 210-31 210 210-32	1 7/8 1 15/16 2	50	189	157	22	16	40	16	116	54.6	94	51.6	19.0	M14	1/2	UC210-30 210-31 210 210-32	FA210	2.4	
UCFA211-32 211-34 211 211-35	2 2 1/8 2 3/16	55	216	184	25	16	43	16	133	58.4	104	55.6	22.2	M14	1/2	UC211-32 211-34 211 211-35	FA211	3.4	

悬挂式座
Flange Bracket Units


UCFB 200 (normal-duty)

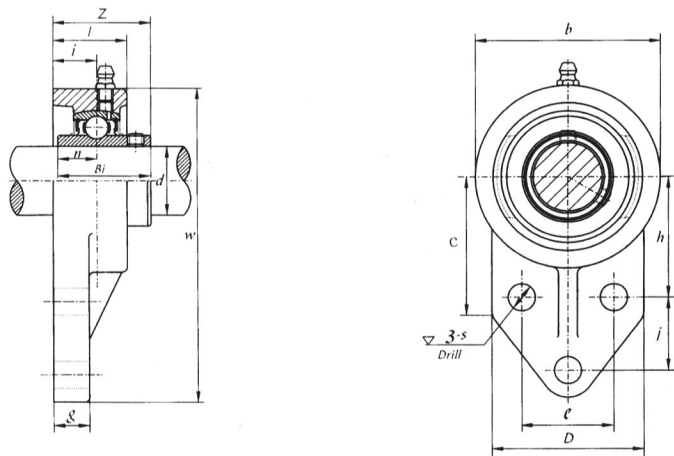

带座轴承代号 Bearing Unit No.	轴 径 Shaft Dia.		外形尺寸(毫米) Dimensions (mm)															螺 栓 Bolt Used		Bearing No.	Housing No.	重量 Weight (kg)
	(in.)	(mm)	w	b	c	D	l	s	g	h	j	e	i	z	Bi	n	(mm)	(in.)				
UCFB201 201-8	1/2	12	110	62	52	52	25.5	10	13	42	27	32	15	31.8	31.0	12.7	M8	5/16	UC201 201-8	FB201	0.64	
UCFB202 202-10	5/8	15	110	62	52	52	25.5	10	13	42	27	32	15	31.8	31.0	12.7	M8	5/16	UC202 202-10	FB202	0.64	
UCFB203 203-11	11/16	17	110	62	52	52	25.5	10	13	42	27	32	15	31.8	31.0	12.7	M8	5/16	UC203 203-11	FB203	0.64	
UCFB204-12 204	3/4	20	110	62	52	52	25.5	10	13	42	27	32	15	31.8	31.0	12.7	M8	5/16	UC204-12 204	FB204	0.64	
UCFB205-14 205-15 205 205-16	7/8 15/16 1	25	116	68	52	56	27	10	13	45	27	34	16	34.7	34	14.3	M8	5/16	UC205-14 205-15 205 205-16	FB205	0.68	
UCFB206-18 206 206-19 206-20	1 1/8 1 3/16 2	30	132	80	55	65	31	10	13	50	32	40	18	39.2	38.1	15.9	M8	5/16	UC206-18 206 206-19 206-20	FB206	0.92	
UCFB207-20 207-21 207-22 207 207-23	1 1/4 1 5/16 1 3/8 1 7/16	35	144	90	62	70	34	10	15	55	32	46	19	44.4	42.9	17.5	M8	5/16	UC207-20 207-21 207-22 207 207-23	FB207	1.3	
UCFB208-24 208-25 208	1 1/2 1 9/16	40	164	100	72	78	36	12	16	60	41	50	21	51.2	49.2	19	M10	3/8	UC208-24 208-25 208	FB208	1.8	
UCFB209-26 209-27 209-28 209	1 5/8 1 11/16 1 3/4	45	175	106	76	80	38	12	18	65	43	54	22	52.2	49.2	19	M10	3/8	UC209-26 209-27 209-28 209	FB209	2.0	
UCFB210-30 210-31 210 210-32	1 7/8 1 15/16 2	50	184	114	82	86	40	12	18	68	46	58	22	54.6	51.6	19	M10	3/8	UC210-30 210-31 210 210-32	FB210	2.3	

悬吊式座
Screw Conveyor Hanger Units


UCHA 200 (normal-duty)

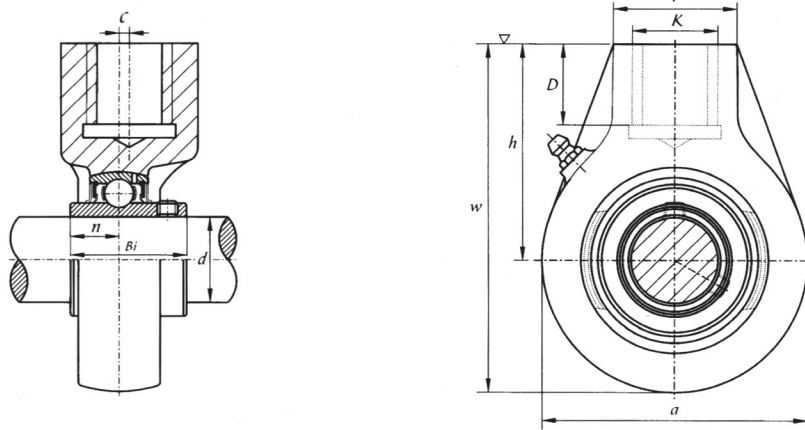

带座轴承代号 Bearing Unit No.	轴 径 Shaft Dia.		外形尺寸(毫米) Dimensions (mm)									Bearing No.	Housing No.	重量 Weight (kg)
	d		a	w	c	h	l	D	K	Bi	n			
	(in.)	(mm)												
UCHA201 201-8	1/2	12	64	96	0	64	40	19	G3/4	31.0	12.7	UC201 201-8	HA201	0.77
UCHA202 202-10	5/8	15	64	96	0	64	40	19	G3/4	31.0	12.7	UC202 202-10	HA202	0.77
UCHA203 203-11	11/16	17	64	96	0	64	40	19	G3/4	31.0	12.7	UC203 203-11	HA203	0.77
UCHA204-12 204	3/4	20	64	96	0	64	40	19	G3/4	31.0	12.7	UC204-12 204	HA204	0.77
UCHA205-14 205-15 205 205-16	7/8 15/16 1	25	78	103	0	64	40	19	G3/4	34	14.3	UC205-14 205-15 205 205-16	HA205	0.87
UCHA206-18 206 206-19 206-20	1 1/8 1 3/16 1 1/4	30	78	103	0	64	40	19	G3/4	38.1	15.9	UC206-18 206 206-19 206-20	HA206	0.83
UCHA207-20 207-21 207-22 207 207-23	1 1/4 1 5/16 1 3/8 1 3/16	35	92	116	0	70	40	19	G3/4	42.9	17.5	UC207-20 207-21 207-22 207 207-23	HA207	1.2
UCHA208-24 208-25 208	1 1/2 1 9/16	40	96	121	2	73	40	19	G3/4	49.2	19.0	UC208-24 208-25 208	HA208	1.3
UCHA209-26 209-27 209-28 209	1 5/8 1 11/16 1 3/4	45	108	136	5	82	48	21	G1	49.2	19	UC209-26 209-27 209-28 209	HA209	1.7
UCHA210-30 210-31 210 210-32	1 7/8 1 15/16 2	50	118	142	5	83	48	21	G1	51.6	19.0	UC210-30 210-31 210 210-32	HA210	2.1
UCHA211-32 211-34 211 211-35	2 2 1/8 2 3/16	55	126	150	7	95	60	25	G1 1/4	55.6	22.2	UC211-32 211-34 211 211-35	HA211	2.8
UCHA212-36 212 212-38 212-39	2 1/4 2 3/8 2 7/16	60	142	173	9	102	60	28	G1 1/4	65.1	25.4	UC212-36 212 212-38 212-39	HA212	3.9
UCHA213-40 213	2 1/2	65	166	200	9.5	117	70	32	G1 1/2	65.1	25.4	UC213-40 213	HA213	5.8
UCHA214-44 214	2 3/4	70	166	200	9.5	117	70	32	G1 1/2	74.6	30.2	UC214-44 214	HA214	5.9
UCHA215 215-47 215-48	2 15/16 3	75	166	200	9.5	117	70	32	G1 1/2	77.8	33.3	UC215 215-47 215-48	HA215	5.6

带顶丝外球面球轴承
Ball Bearing
(with setscrews)


UC 200 (normal-duty)

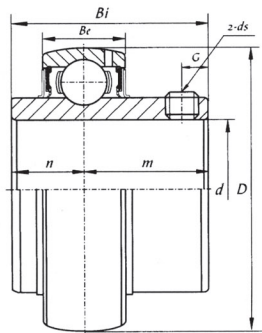

轴承代号 Bearing No.	轴 径 Shaft Dia.		外形尺寸(毫米) Dimensions (mm)							额定动负荷 Basic Dynamic Load Rating (N)	额定静负荷 Basic Static Load Rating (N)	重 量 Weight (kg)
	d											
	(in.)	(mm)	D	Bi	Be	n	m	G	ds			
UC201 201-8	1/2	12	47	31.0	16	12.7	18.3	5	M6X1.0	12800	6650	0.2 0.19
UC202 202-10	5/8	15	47	31.0	16	12.7	18.3	5	M6X1.0	12800	6650	0.18 0.18
UC203 203-11	11/16	17	47	31.0	16	12.7	18.3	5	M6X1.0	12800	6650	0.17
UC204-12 204	3/4	20	47	31.0	16	12.7	18.3	5	M6X1.0	12800	6650	0.16 0.15
UC205-14 205-15 205 205-16	7/8 15/16 1	25	52	34.1	17	14.3	19.8	5.5	M6X1.0	14000	7880	0.22 0.20 0.19 0.19
UC206-18 206 206-19 206-20	1 1/8 1 3/16 1 1/4	30	62	38.1	19	15.9	22.2	6	M6X1.0	14500	11200	0.32 0.3 0.3
UC207-20 207-21 207-22 207 207-23	1 1/4 1 5/16 1 3/8 1 7/16	35	72	42.9	20	17.5	25.4	6.5	M8X1.0	25700	15200	0.50 0.48 0.45 0.45 0.42
UC208-24 208-25 208	1 1/2 1 9/16	40	80	49.2	21	19	30.2	8	M8X1.0	29600	18200	0.64 0.6 0.59
UC209-26 209-27 209-28 209	1 5/8 1 11/16 1 3/4	45	85	49.2	22	19	30.2	8	M8X1.0	31850	20800	0.74 0.71 0.68 0.65
UC210-30 210-31 210 210-32	1 7/8 1 15/16 2	50	90	51.6	23	19	32.6	10	M10X1.0	35100	23200	0.85 0.76 0.74 0.71
UC211-32 211-34 211 211-35	2 2 1/8 2 3/16	55	100	55.6	25	22.2	33.4	10	M10X1.0	43550	29200	1.10 1.01 0.96 0.93
UC212-36 212 212-38 212-39	2 1/4 2 3/8 2 7/16	60	110	65.1	27	25.4	39.7	10	M10X1.0	47800	32800	1.51 1.38 1.37 1.27
UC213-40 213	2 1/2	65	120	65.1	28	25.4	39.7	10	M10X1.0	57200	40000	1.75 1.67
UC214-44 214	2 3/4	70	125	74.6	29	30.2	44.4	12	M12X1.5	60800	45000	1.95 1.95
UC215 215-47 215-48	2 15/16 3	75	130	77.8	30	33.3	44.5	12	M12X1.5	66000	49500	2.14 2.17 2.16
UC216 216-50	3 1/8	80	140	82.6	33	33.3	49.3	12	M12X1.5	71500	54200	2.61
UC217-52 217	3 1/4	85	150	85.7	35	34.1	51.6	12	M12X1.5	83200	63800	3.38
UC218-56 218	3 1/2	90	160	96.0	37	39.7	56.3	12	M12X1.5	95900	71500	4.1 4.0
UC220		100	180	108	40	42	66	12	M12X1.5	122000	92800	6.1

带顶丝外球面球轴承
Ball Bearings
(with setscrews)

UCX00 (medium-duty)

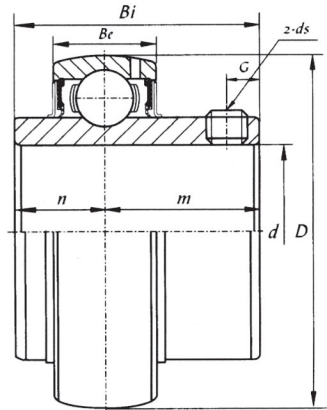


轴承代号 Bearing No.	轴 径 Shaft Dia.		外形尺寸(毫米) Dimensions (mm)							额定动负荷 Basic Dynamic Load Rating (N)	额定静负荷 Basic Static Load Rating (N)	重 量 Weight (kg)
	d											
	(in.)	(mm)	D	Bi	Be	n	m	G	ds			
UCX05 X05-16	1	25	62	38.1	19	15.9	22.2	6.0	M6X1.0	19500	11200	0.37
UCX06 X05-19 X06-20	1 3/16 1 1/4	30	72	42.9	20	17.5	25.4	6.5	M8X1.0	25700	15200	0.54
UCX07-20 X07-22 X07 X07-23	1 1/4 1 3/8 1 7/16	35	80	49.2	21	19.0	30.2	8.0	M8X1.0	29600	18200	0.71
UCX08-24 X08	1 1/2	40	85	49.2	22	19.0	30.2	8.0	M8X1.0	31800	20800	0.79
UCX09-27 X09-28 X09	1 11/16 1 3/4	45	90	51.6	23	19.0	32.6	10	M10X1.0	35100	23200	0.92
UCX10-31 X10 X10-32	1 15/16 2	50	100	55.6	25	22.2	33.4	10	M10X1.0	43500	29200	1.20
UCX11 X11-32 X11-35 X11-36	2 2 3/16 2 1/4	55	110	65.1	27	25.4	39.7	10	M10X1.0	47800	32800	1.63
UCX12 X12-36 X12-38 X12-39	2 2 3/8 2 7/16	60	120	65.1	28	25.4	39.7	10	M10X1.0	57200	40000	1.95
UCX13-40 X13	2 1/2	65	125	74.6	29	30.2	44.4	12.0	M12X1.5	60800	45000	2.32
UCX14-44 X14	2 3/4	70	130	77.8	30	33.3	44.5	12.0	M12X1.5	66000	49500	2.53
UCX15 X15-47 X15-48	2 15/16 3	75	140	82.6	33	33.3	49.3	12.0	M12X1.5	71500	54200	3.06
UCX16 X16-50	3 1/8	80	150	85.7	35	34.1	51.6	12.0	M12X1.5	83200	63800	3.61
UCX17 X17-52	3 1/4	85	160	96.0	37	39.7	56.3	12.0	M12X1.5	95900	71500	4.55
UCX18-56 X18	3 1/2	90	170	104.0	39	42.9	61.1	16.0	M14X1.5	109000	82800	5.42
UCX20 X20-64	4	100	190	117.5	43	49.2	68.3	18.0	M16X1.5	133000	105000	7.6

带顶丝外球面球轴承

Ball Bearings
(with setscrews)

UC 300 (heavy-duty)

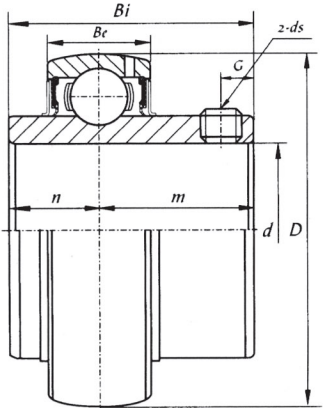


轴承代号 Bearing No.	轴 径 Shaft Dia.		外形尺寸(毫米) Dimensions(mm)							额定动负荷 Basic Dynamic Load Rating (N)	额定静负荷 Basic Static Load Rating (N)	重 量 Weight (kg)
	d											
	(in.)	(mm)	D	Bi	Be	n	m	G	ds			
UC305 305-16	1	25	62	38	20	15	23	6	M6X1.0	22400	11500	0.34
UC306-18 306 306-20	1 1/18 1 1/4	30	72	43	23	17	26	6	M6X1.0	26500	15200	0.52
UC307-20 307-22 307	1 1/4 1 3/8	35	80	48	25	19	29	8	M8X1.0	33300	19200	0.68
UC308-24 308	1 1/2	40	90	52	27	19	33	10	M10X1.0	40600	23700	0.95
UC309-28 309	1 3/4	45	100	57	30	22	35	10	M10X1.0	48600	28900	1.22
UC310-31 310 310-32	1 15/16 2	50	110	61	32	22	39	12	M12X1.5	61700	37800	1.57
UC311-32 311	2	55	120	66	34	25	41	12	M12X1.5	71500	44800	1.98
UC312 312-36	2 1/4	60	130	71	36	26	45	12	M12X1.5	81600	51800	2.45
UC313-40 313	2 1/2	65	140	75	38	30	45	12	M12X1.5	93700	60400	3.14
UC314-44 314	2 3/4	70	150	78	40	33	45	12	M12X1.5	103600	67100	3.62
UC315 315-48	3	75	160	82	42	32	50	14	M14X1.5	112800	75700	4.50
UC316 316-50	3 1/8	80	170	86	44	34	52	14	M14X1.5	123500	88200	5.2
UC317 317-52	3 1/4	85	180	96	46	40	56	16	M16X1.5	133000	96500	6.63
UC318-56 318	3 1/2	90	190	96	48	40	56	16	M16X1.5	144700	110600	7.33
UC319		95	200	103	50	41	62	16	M16X1.5	156600	122000	8.37
UC320 320-64	4	100	215	108	54	42	66	18	M16X1.5	171600	141000	10.32
UC322		110	240	117	60	46	71	18	M18X1.5	205000	179000	14.2
UC324		120	260	126	64	51	75	18	M18X1.5	227000	207000	18.20
UC326		130	280	135	68	54	81	20	M20X1.5	253000	241000	22.50
UC328		140	300	145	72	59	86	20	M20X1.5	274000	272000	29.4

带偏心套外球面球轴承

Ball Bearings
(with eccentric locking collar)


HC 200 (normal-duty)

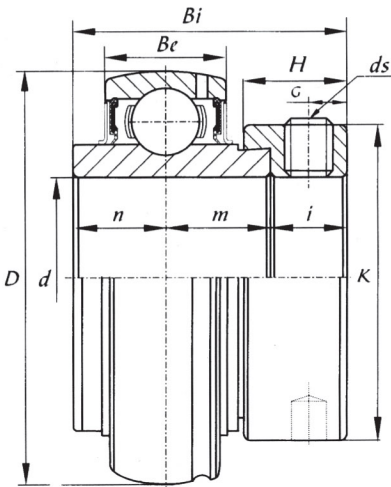

轴承代号 Bearing No.	轴 径 Shaft Dia.		外形尺寸(毫米) Dimensions (mm)										额定动负荷 Basic Dynamic Load Rating (N)	额定静负荷 Basic Static Load Rating (N)	重 量 Weight (kg)
	d		D	Bi	Be	n	m	i	k	H	G	ds			
	(in.)	(mm)													
HC203 203-11	11/16	17	47	43.7	16	17.0	17.0	9.5	33.3	13.5	5.0	M6X1	12800	6650	0.25
HC204-12 204	3/4	20	47	43.7	16	17.0	17.0	9.5	33.3	13.5	5.0	M6X1	12800	6650	0.23 0.22
HC205-14 205-15 205 205-16	7/8 15/16 1	25	52	44.4	17	17.4	17.4	9.5	38.1	13.5	5.0	M6X1	14000	7880	0.29 0.27 0.25 0.25
HC206-18 206 206-19 206-20	1 1/8 1 3/16 1 1/4	30	62	48.4	19	18.3	18.2	11.9	44.5	15.9	6.0	M8X1	19500	11200	0.43 0.41 0.41 0.38
HC207-20 207-22 207 207-23	1 1/4 1 3/8 1 7/16	35	72	51.1	20	18.8	18.8	13.5	55.6	17.5	6.5	M8X1	25700	15200	0.68 0.61 0.61 0.58
HC208-24 208	1 1/2	40	80	56.3	21	21.4	21.4	13.5	60.3	18.3	6.5	M8X1	29600	18200	0.83 0.79 0.78
HC209-26 209-27 209-28 209	1 5/8 1 11/16 1 3/4	45	85	56.3	22	21.4	21.4	13.5	63.5	18.3	6.5	M8X1	31850	20800	0.96 0.91 0.87 0.85
HC210-31 210 210-32	1 15/16 2	50	90	62.7	23	24.6	24.6	13.5	69.9	18.3	6.5	M8X1	35100	23200	1.04 1.01
HC211-32 211 211-35	2 2 3/16	55	100	71.4	25	27.7	27.7	15.9	76.2	20.7	8.0	M10X1	43550	29200	1.58 1.39 1.36
HC212-36 212 212-39	2 1/4 2 7/16	60	110	77.8	27	30.9	30.9	15.9	84.2	22.3	8.0	M10X1	47800	32800	2.03 1.87 1.76
HC213-40 213	2 1/2	65	120	85.7	28	34.1	34.1	17.1	86	23.5	8.5	M10X1	57200	40000	2.51
HC215-47 215 215-48	2 15/16 3	75	130	92.1	30	37.3	37.3	17.1	102	23.5	8.5	M10X1	60800	45000	2.74

带圆锥孔外球面球轴承
UK Ball Bearings
(with tapered bore)


UK 200 (normal-duty)

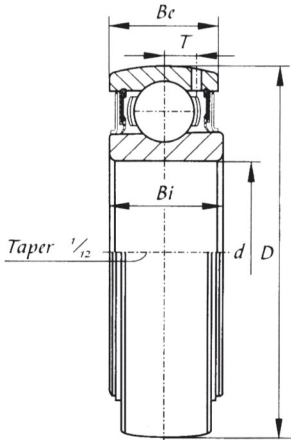

轴承代号 Bearing No.	轴 径 Shaft Dia.	外形尺寸(毫米) Dimensions (mm)					额定动负荷 Basic Dynamic Load Rating (N)	额定静负荷 Basic Static Load Rating (N)	重 量 Weight (kg)
	d (mm)	D	Bi	Be	Bi (TRL)	T			
UK205	25	52	25	17	24	4.2	14000	7850	0.16
UK206	30	62	28	19	27	5.2	19450	11250	0.25
UK207	35	72	30	20	30	5.6	25700	15200	0.36
UK208	40	80	32	21	34	6.2	29600	18100	0.44
UK209	45	85	33	22	36	6.3	31850	20800	0.51
UK210	50	90	35	23	36	6.5	35100	23200	0.56
UK211	55	100	37	25	40	7.0	43550	29200	0.74
UK212	60	110	40	27	47	7.0	47800	32800	1.00
UK213	65	120	42	30	47	8.5	57200	40000	1.27
UK215	75	130	45	32	51	9.2	66000	49500	1.52
UK216	80	140	45	33	55	9.6	71500	53300	1.84
UK217	85	150	47	35	57	10.5	83200	63800	2.34
UK218	90	160	50	37	63	11.1	95900	71500	2.85

带止动环深沟球轴承
Ball Bearings
(with locating snap ring)

SER 200 (normal-duty)

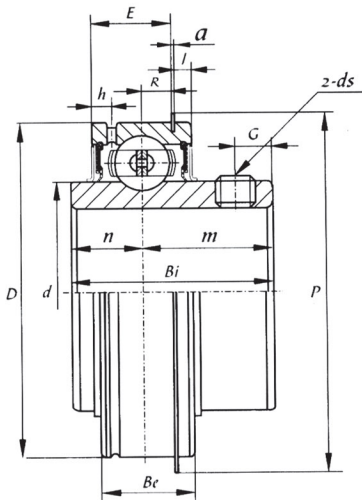

轴承代号 Bearing No.	轴 径 Shaft Dia.		外形尺寸(毫米) Dimensions (mm)													额定动负荷 Basic Dynamic Load Rating (kg)	额定静负荷 Basic Static Load Rating (kg)	重 量 Weight (kg)
	d		D	Bi	Be	n	m	E	a	h	R	J	P	G	ds			
	(in.)	(mm)																
SER201 201-8	1/2	12	47	31.0	15.9	11.5	19.5	12.09	1.07	4.0	4.14	2.46	52.7	5.0	M6X1.0	1010	630	0.22
SER202 202-10	5/8	15	47	31.0	15.9	11.5	19.5	12.09	1.07	4.0	4.14	2.46	52.7	5.0	M6X1.0	1010	630	0.22
SER203 203-11	11/16	17	47	31.0	15.9	11.5	19.5	12.09	1.07	4.0	4.14	2.46	52.7	5.0	M6X1.0	1010	630	0.22
SER204-12 204	3/4	20	47	31.0	15.9	11.5	19.5	12.09	1.07	4.0	4.14	2.46	52.7	5.0	M6X1.0	1010	630	0.21
SER205-14 205-15 205-16	7/8 15/16 1	25	52	34.9	19.1	13.1	21.8	15.29	1.07	5.2	5.74	2.46	57.9	5.6	M6X1.0	1100	710	0.27
SER206-18 206 206-19 206-20	1 1/8 1 3/16 1 1/4	30	62	38.1	22.2	15.9	22.2	17.02	1.65	5.6	5.92	3.28	67.7	5.6	M6X1.0	1530	1020	0.39
SER207-20 207-22 207 207-23	1 1/4 1 3/8 1 7/16	35	72	42.9	23.8	17.5	25.4	18.62	1.65	5.6	6.72	3.28	78.6	6.4	M8X1.0	2020	1390	0.56
SER208-24 208	1 1/2	40	80	49.2	27.8	19.0	30.2	22.62	1.65	6.4	8.72	3.28	86.6	8.0	M8X1.0	2280	1590	0.72
SER209-26 209-27 209-28 209	1 5/8 1 11/16 1 3/4	45	85	49.2	27.8	19.0	30.2	22.62	1.65	6.4	8.72	3.28	91.6	8.0	M8X1.0	2560	1810	0.90
SER210-30 210-31 210 210-32	1 7/8 1 15/16 2	50	90	51.6	28.6	19.0	32.6	22.62	2.41	7.5	8.32	3.28	96.5	9.5	M10X1.0	2750	2020	0.93
SER211-32 211 211-35	2 2 3/16	55	100	55.6	30.2	22.2	33.4	24.22	2.41	7.5	9.12	3.28	106.5	9.5	M10X1.0	3400	2550	1.29
SER212-36 212 212-39	2 1/4 2 7/16	60	110	65.1	31.8	25.4	39.7	25.82	2.41	7.5	9.92	3.28	116.6	11.1	M10X1.0	4100	3150	1.71


带偏心套球轴承

Ball Bearings

(with eccentric collar)


SA 200 (light-duty)

Spherical O.D.

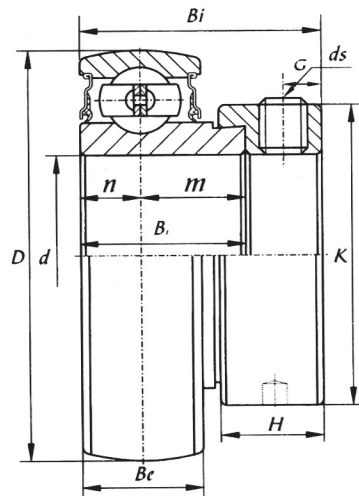


CSA 200 (light-duty)

Cylindrical O.D.

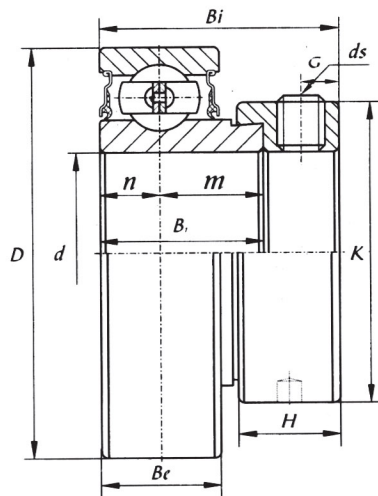

SA 200G

Relubricatable type

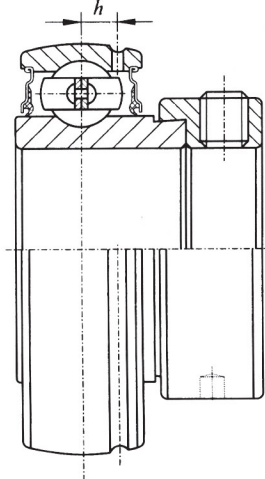

轴承代号 Bearing No.	轴 径 Shaft Dia.		外形尺寸(毫米) Dimensions (mm)											额定动负荷 Basic Dynamic Load Rating (N)	额定静负荷 Basic Static Load Rating (N)	重 量 Weight (kg)
	d		Be	D	Bl	n	m	Bi	K	H	G	h	ds			
	(in.)	(mm)														
SA201 201-8	1/2	12	12	40	19.1	6.0	131	28.6	28.6	13.5	5.0	3.6	M6X1.0	9600	4600	0.13
SA202 202-10	5/8	15	12	40	19.1	6.0	13.1	28.6	28.6	13.5	5.0	3.6	M6X1.0	9600	4600	0.12
SA203 203-11	11/16	17	12	40	19.1	6.0	13.1	28.6	28.6	13.5	5.0	3.6	M6X1.0	9600	4600	0.10
SA204-12 204	3/4	20	14	47	21.5	7.5	14.5	31.0	33.3	13.5	5.0	4	M6X1.0	12800	6650	0.16
SA205-14 205 205-16	7/8 1	25	15	52	21.5	7.5	14	31.0	38.1	13.5	5.0	4.3	M6X1.0	14000	7880	0.19
SA206-18 206 206-19 206-20	1 1/8 1 3/16 1 1/4	30	16	62	23.8	9.0	14.8	35.7	44.5	15.9	6.0	5	M8X1.0	19500	11200	0.30
SA207-20 207-22 207 207-23	1 1/4 1 3/8 1 7/16	35	17	72	25.4	9.5	15.9	38.9	55.6	17.5	6.5	5.7	M8X1.0	25700	15200	0.45
SA208-24 208-25 208	1 1/2 1 9/16	40	18	80	30.2	11	19.2	43.7	60.3	18.3	6.5	6.2	M8X1.0	29600	18200	0.60
SA209-26 209-27 209 209-28	1 5/8 1 11/16 1 3/4	45	19	85	30.2	11	19.2	43.7	63.5	18.3	6.5	6.8	M8X1.0	31850	20800	0.64
SA210-30 210-31 210	1 7/8 1 15/16	50	20	90	30.2	11	19.2	43.7	69.9	18.3	6.5	6.5	M8X1.0	35100	23200	0.71
SA211-32 211-34 211 211-35	2 2 1/8 2 3/16	55	21	100	32.5	12	20.5	48.4	76.2	20.7	8	7.2	M10X1.0	43550	29200	0.87
SA212-36 212 212-38 212-39	2 1/4 2 3/8 2 7/16	60	22	110	37.2	13.5	21.4	53.1	84.2	22.3	8	8	M10X1.0	47800	32800	1.3


带顶丝球轴承

Ball Bearings

(with setscrews)


SB 200 (light-duty)

Spherical O.D.

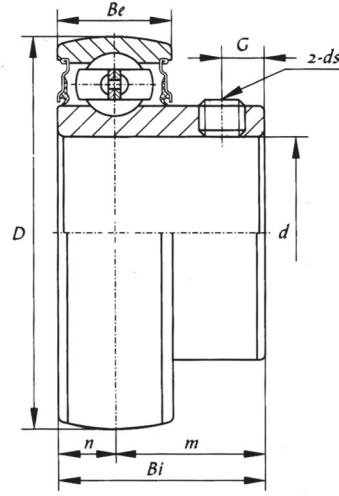


CSB 200 (light-duty)

Cylindrical O.D.

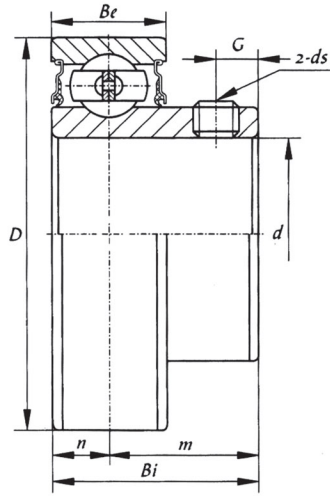

SB 200G

Relubricatable type

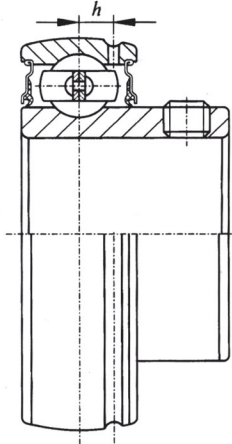


轴承代号 Bearing No.	轴 径 Shaft Dia.		外形尺寸(毫米) Dimensions(mm)								额定动负荷 Basic Dynamic Load Rating (N)	额定静负荷 Basic Static Load Rating (N)	重 量 Weight (kg)
	d												
	(in.)	(mm)	Be	D	Bi	n	m	G	h	ds			
SB201 201-8	1/2	12	12	40	22	6.0	16.0	4.5	3.6	M5X0.8	9600	4600	0.10
SB202 202-10	5/8	15	12	40	22	6.0	16.0	4.5	3.6	M5X0.8	9600	4600	0.09
SB203 203-11	11/16	17	12	40	22	6.0	16.0	4.5	3.6	M5X0.8	9600	4600	0.08
SB204-12 204	3/4	20	14	47	25	7.0	18.0	4.5	3.9	M6X1.0	12800	6650	0.12
SB205-14 205 205-16	7/8 1	25	15	52	27	7.5	19.5	5.5	3.9	M6X1.0	14000	7880	0.16
SB206-18 206 206-19 206-20	1 1/8 1 3/16 1 1/4	30	16	62	30	8.0	22.0	6.0	5.0	M6X1.0	19500	11200	0.25
SB207-20 207-22 207 207-23	1 1/4 1 3/8 1 7/16	35	17	72	32	8.5	23.5	6.0	5.5	M8X1.0	25700	15200	0.36
SB208-24 208	1 1/2	40	18	80	34	9.0	25.0	7.0	6.0	M8X1.0	29600	18200	0.45
SB209-26 209-27 209 209-28	1 5/8 1 11/16 1 3/4	45	19	85	41.2	10.2	31.0	8.2	6.3	M8X1.0	31850	20800	0.56
SB210-30 210-31 210 210-32	1 7/8 1 13/16 2	50	20	90	43.5	10.9	32.6	9.2	6.5	M8X1.0	35100	23200	0.62
SB211-32 211-34 211 211-35	2 2 1/8 2 3/16	55	21	100	45.3	11.8	33.5	9.8	7.2	M8X1.0	43550	29200	1.1
SB212 212-36	2 1/4	60	22	110	53.7	14.9	38.8	9.8	8	M10X1.0	47800	32800	1.3

农机轴承

AGRI-BEARING

SQUARE BORE WITHOUT GREASE NIPPLE

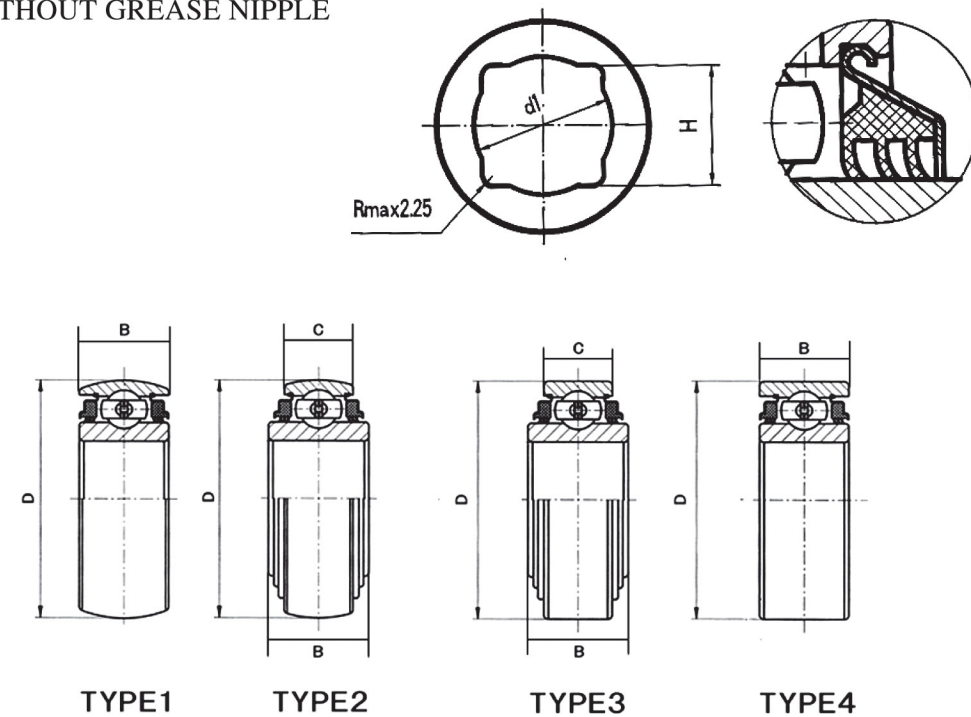

轴承代号 Bearing No.	型号 Type	外形尺寸(毫米) Dimensions(mm)					额定动负荷 Basic Load	额定静负荷 Basic Statie Load Rating	重量 Weight
		H	d1	D	C	B	Rating CR (KN)	Load Rating COR (KN)	(KG)
W208PPB13	1	22.970	24.000	80.000	18.00	36.53	22.71	15.94	0.690
W208PPB6	1	26.000	28.000	80.000	18.00	36.53	22.71	15.94	0.652
W208PP6	3	26.000	32.000	80.000	18.00	36.53	22.71	15.94	0.662
W208PPB5	1	29.970	32.000	80.000	18.00	36.53	22.71	15.94	0.590
W208PPB8	1	29.970	32.000	80.000	30.18	36.53	22.71	15.94	0.735
W208PP5	3	29.970	32.000	80.000	18.00	36.53	22.71	15.94	0.600
W208PP20	3	29.970	32.000	80.000	18.00	36.53	22.71	15.94	0.681
W208PP8	3	29.970	32.000	80.000	30.18	36.53	22.71	15.94	0.709
W209PPB5	1	33.000	32.000	85.000	30.18	36.53	24.36	17.11	0.945
W210PP4	4	29.970	32.000	100.000	30.18	30.18	27.50	20.20	1.049
W210PPB6	1	29.970	32.000	90.000	30.18	36.53	27.50	20.20	0.733
W210PPB4	2	29.970	32.000	90.000	30.18	30.18	27.50	20.20	0.846
W211PPB3	2	38.890	42.000	100.000	33.34	33.34	33.40	25.10	1.208
W211PP3	4	38.890	42.000	100.000	33.34	33.34	33.40	25.10	1.271
W211PP5	3	38.890	42.000	101.600	44.45	44.45	33.40	25.10	1.302



STRONG COMMITMENT MAKES US PROFESSIONAL!